


Dane aktualne na dzień: 14-06-2026 00:14

Link do produktu: <https://www.nobshop.pl/kontroler-lotu-matek-f722-hd-p-2603.html>

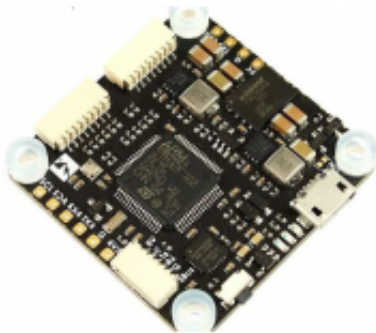


## Kontroler lotu FC Matek F722 HD Multi i Wing

Cena brutto	<b>179,99 zł</b>
Cena netto	<b>146,33 zł</b>
Dostępność	<b>Aktualnie niedostępny</b>
Czas wysyłki	<b>1 - 3 dni</b>
Producent	<b>Matek Systems</b>

### Opis produktu

#### Kontroler Lotu Matek F722 HD

Kontroler lotu F722 marki Matek to multifunkcyjny kontroler lotu w wersji HD umożliwiającej podłączenie cyfrowego systemu wizji DJI Air Unit lub Caddx Vista. Kontroler posiada wydajny procesor F7 o taktowaniu 216 MHz, który obsługuje większość dostępnych urządzeń gotowych do podłączenia przy jednoczesnym zachowaniu wysokiej kultury pracy. W kontrolerze Mateka zastosowano wysokiej jakości żyroskop 6 osiowy MPU6000, który doskonale pozycjonuje pozycję modelu w przestrzeni. Dzięki wbudowanemu barometrowi BMP280, model ma możliwość utrzymywania zadanej wysokości. W celu wykonywania lotów autonomicznych użytkownik ma możliwość zainstalowania modułu GPS. Zalecanym oprogramowaniem dla tego kontrolera jest oprogramowanie Betaflight lub Inav. W przypadku montażu w samolocie zalecane jest PDB F722-PX-W.

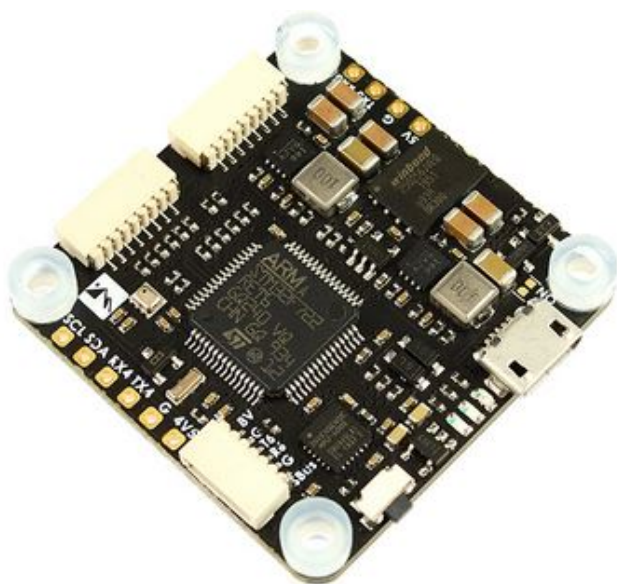



## MATEKSYS Flight Controller F722-HD

MCU: 216MHz STM32F722RET6  
 IMU: MPU6000 (SPI)  
 Baro: BMP280 (I2C)  
 OSD: external FrskyOSD/DJI OSD via Uart  
 Blackbox: 32M-byte Flash (SPI)  
 6x Uarts & 1x Softserial Tx option  
 10x Dshot/PWM outputs  
 1x I2C, 4x ADC

Switchable 8V output

9-36V DC IN (3-8S LiPo)  
 BEC: 5V 2A cont. (Max.3A)  
 BEC: 8V 2A cont. (Max.3A)

INAV Target MATEKF722PX  
 BetaFlight Target MATEKF722HD

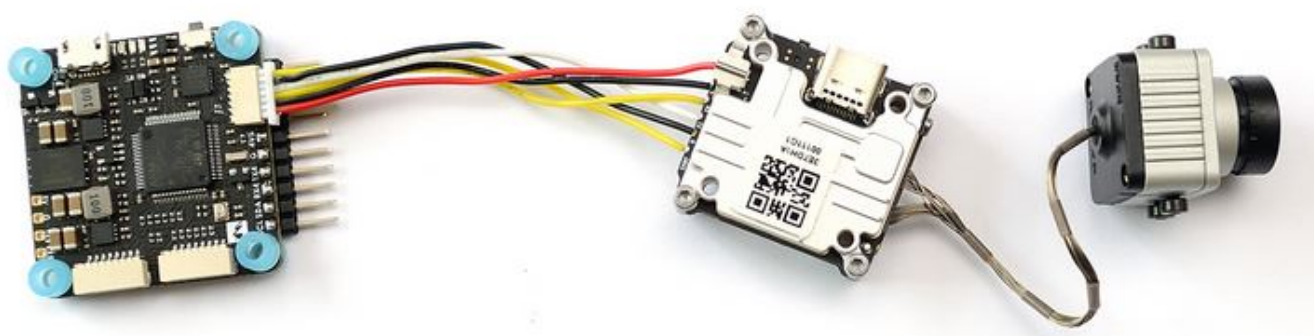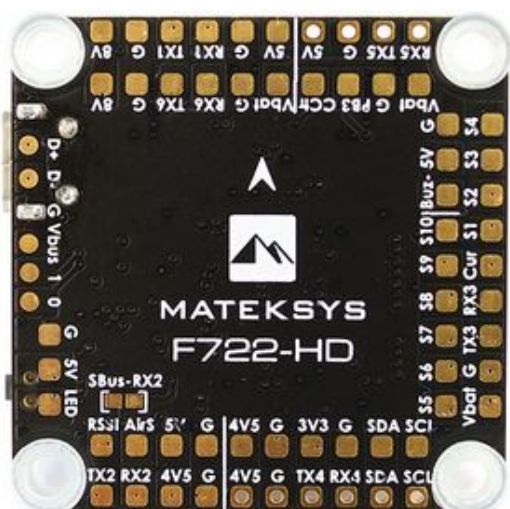

**Specyfikacja:**

---

FC:  
MCU - 216MHz STM32F722RET6  
IMU - MPU6000 (SPI)  
Baro - BMP280 (I2C)  
Blackbox - 32M-byte Flash memory (SPI)  
OSD- Support external DJI OSD/FrskyOSD, No Analog MAX7456 OSD built-in

Porty:

6x Uarts with built-in inversion  
1x Softserial Tx option  
10x Dshot/PWM outputs  
1x I2C  
4x ADC (VBAT, Current, RSSI, AirSpeed)  
2x SH1.0\_8pin connector (Vbat/G/Curr/Rx3/S1~S10)  
1x SH1.0\_6pin connector for DJI FPV Air Unit  
3x LEDs for FC STATUS (Blue, Red) and 3.3V indicator(Red)  
Switchable 8V output  
PWM camera control - Yes  
TR/SA VTX control - Yes  
WS2812 Led Strip - Yes  
Beeper - Yes  
RSSI - Yes  
Analog Airspeed sensor - Yes  
Digital Airspeed sensor - Yes

**Zasilanie:**

Input: 9~36V (3~8S LiPo)  
BEC - 5V 2A cont. (Max.3A)  
BEC - 8V 2A cont. (Max.3A)  
LDO 3.3V - Max.200mA  
Battery Voltage Sensor: 1:10 (Scale 110)  
No Current Sensor built-in

**Oprogramowanie FC**

BetaFlight unified target - MATEKF722HD(MTKS)  
INAV target - MATEKF722PX

**Wymiary**

Mounting - 30.5 x 30.5mm,  $\Phi$ 4mm with Grommets  $\Phi$ 3mm  
Dimensions - 36 x 36 x 5 mm  
Weight - 6.5g

**Zawartość:**

1x FC F722-HD  
6x Silicon grommets M4 to M3  
1x SH1.0\_8pin cable 5cm  
2x SH1.0\_8pin connectors  
1x SH1.0\_6pin to GH1.25\_8pin cable 8cm

5V: onboard BEC 5V 2A cont, 3A burst  
 8V: onboard BEC 8V 2A cont, 3A burst  
 \*\*\* 8V ON/OFF can be switched via Modes/USER1 (Default ON)  
 Vbat: Battery voltage

RX1 & TX1: UART1\_RX & TX  
 RX5 & TX5: UART5\_RX & TX  
 RX6 & TX6: UART6\_RX & TX

CCr: PWM camera control  
 G: Ground

D+ & D-: USB data  
 Vbus: USB voltage

I: SWDIO  
 O: SWCLK


LED: 2812 LED signal Ou

Buz- & 5V: General active 5V buzzer  
 Buz- /5V/G: Matek DBU25V

S1-S10: DShot/PWM outputs

Cur: current sensor signal IN  
 Rx3 & Tx3: UART3\_RX & TX

Vbat: Battery voltage, 9-36V DC IN  
 G: Ground

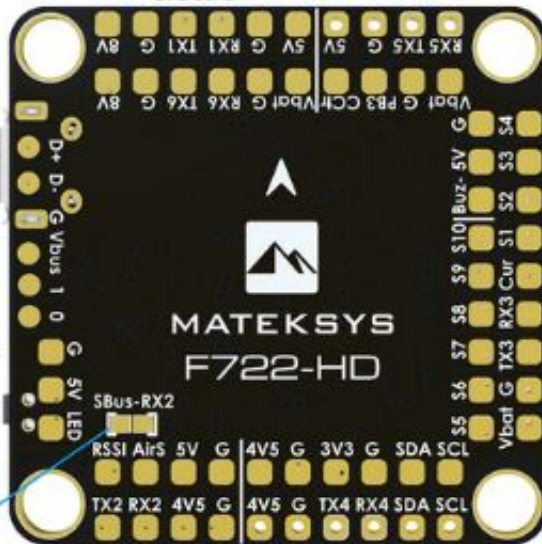

If using non-DJI FPV remote controller, keep this pad unbridged



If using DJI FPV Remote Controller, Bridging this pad will link RX2 to SBus pin on SH1.0-6P connector

4V5: 4.4-4.8V, Max.500mA, the voltage is also supplied when connecting via USB  
 3V3: LDO3.3V Max.200mA

RX2: UART2\_RX for Serial RX by default, PPM share RX2 pad  
 TX2: UART2\_TX  
 \*\*\* TX2 can be used for softserial\_tx1  
 \*\*\* F722 Uarts have built-in inversion, SBus can be connected to any unused UART\_RX.  
 \*\*\* Frsky FPort, SmartPort, Tramp & SmartAudio can be connected to any unused UART\_TX


AirS: Analog Airspeed sensor IN (0-3.3V)  
 RssI: Analog RSSI IN (0-3.3V)

SCL & SDA: I2C1 Bus for Magnetometer/Digital airspeed sensor/OLED  
 TX4 & RX4: UART4\_TX & RX  
 \*\*\* GPS can be connected to any unused UART\_TX & RX

LED 0: Blue, FC Status  
 LED 1: Green, FC Status  
 LED 3.3: Red, 3.3V Status



If using DJI Remote Controller, Bridging this pad is suggested.

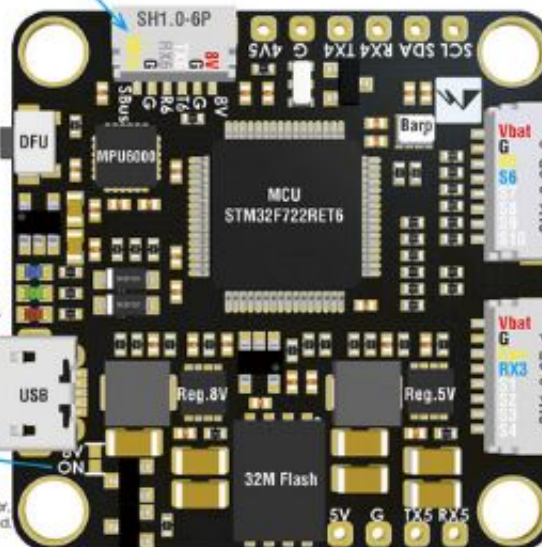

SH1.0-8P\_2 Sequence  
 -Vbt: Battery voltage, 9-36V DC IN  
 -G: Ground  
 -S5/S6/S7/S8/S9/S10: DShot/PWM outputs

SH1.0-8P\_1 Sequence  
 -Vbt: Battery voltage, 9-36V DC IN  
 -G: Ground  
 -Cur: current sensor signal IN  
 -Rx3: UART3\_RX, for BLHelix32 ESC Telemetry  
 -S1/S2/S3/S4: DShot/PWM outputs



Size & Weight: 36x36mm /6.5g  
 Holes: Ø4mm, 30.5mm x 30.5mm

Packing  
 1x F722-HD  
 1x SH1.0\_8pin cable 5cm  
 2x SH1.0\_8pin connector  
 6x M3 Silicon Grommets  
 1x SH1.0\_6pin to GH1.25\_8pin 8cm for DJI air unit

## Wiring (Multirotors)

INAV target MATEKF722PX

BetaFlight unified target MATEKF722HD

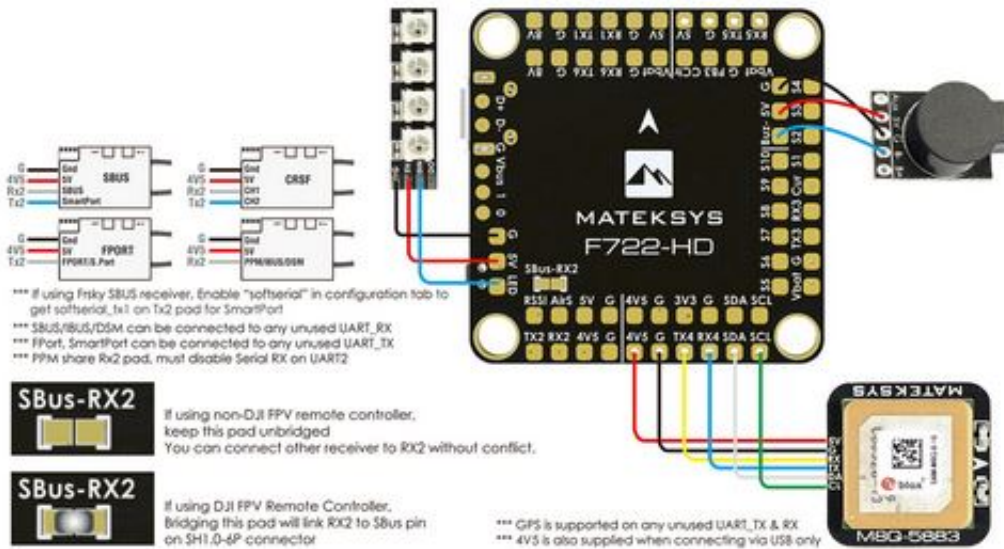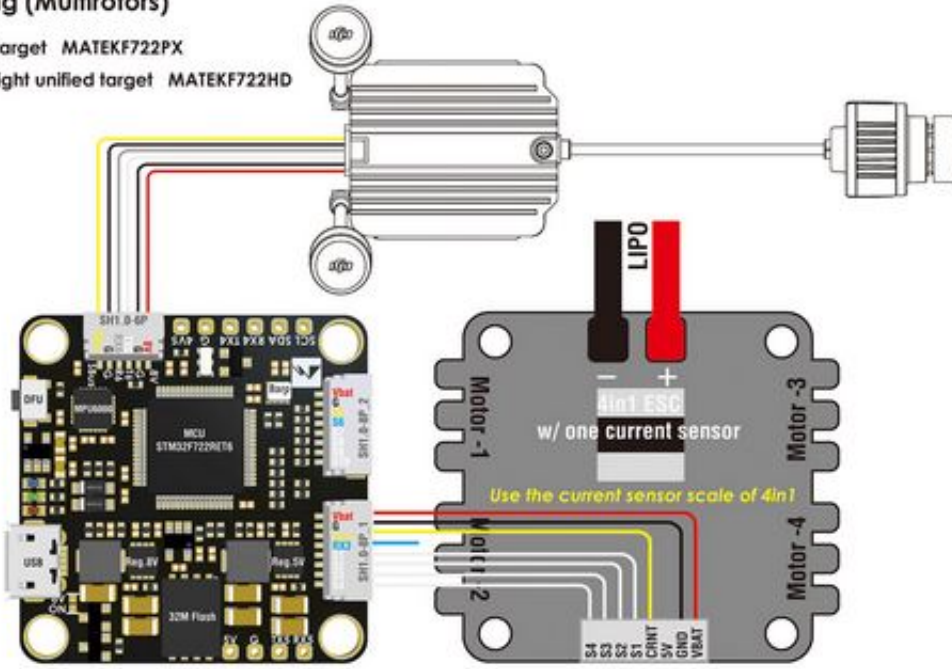

Identifier	Configuration	Serial Rx	Memory Output	Sensor Input
USB VCP	115200	Disabled	AUTO	Disabled
UART1	115200	Disabled	AUTO	Disabled
UART2	115200	Disabled	AUTO	Disabled
UART3	115200	Disabled	AUTO	Disabled
UART4	115200	Disabled	AUTO	Disabled
UART5	115200	Disabled	AUTO	Disabled
UART6	115200	Disabled	AUTO	Disabled
SOFTSERIAL1	115200	Disabled	AUTO	Disabled


Identifier	Data	Memory	RX	Sensors	Peripherals
USB VCP	MSP 115200	Disabled	AUTO	Disabled	115200
UART1	MSP 115200	Disabled	AUTO	Serial Rx	115200
UART2	MSP 115200	Disabled	AUTO	Serial Rx	115200
UART3	MSP 115200	Disabled	AUTO	Serial Rx	115200
UART4	MSP 115200	Disabled	AUTO	Serial Rx	115200
UART5	MSP 115200	Disabled	AUTO	Serial Rx	115200
UART6	MSP 115200	Disabled	AUTO	Serial Rx	115200
SOFTSERIAL1	MSP 115200	Disabled	AUTO	Serial Rx	115200

## 8V output switch (BetaFlight/INAV)



\*\*\* If using DJI FPV Remote Controller, DO NOT enable USER1

## Wiring (Airplane)

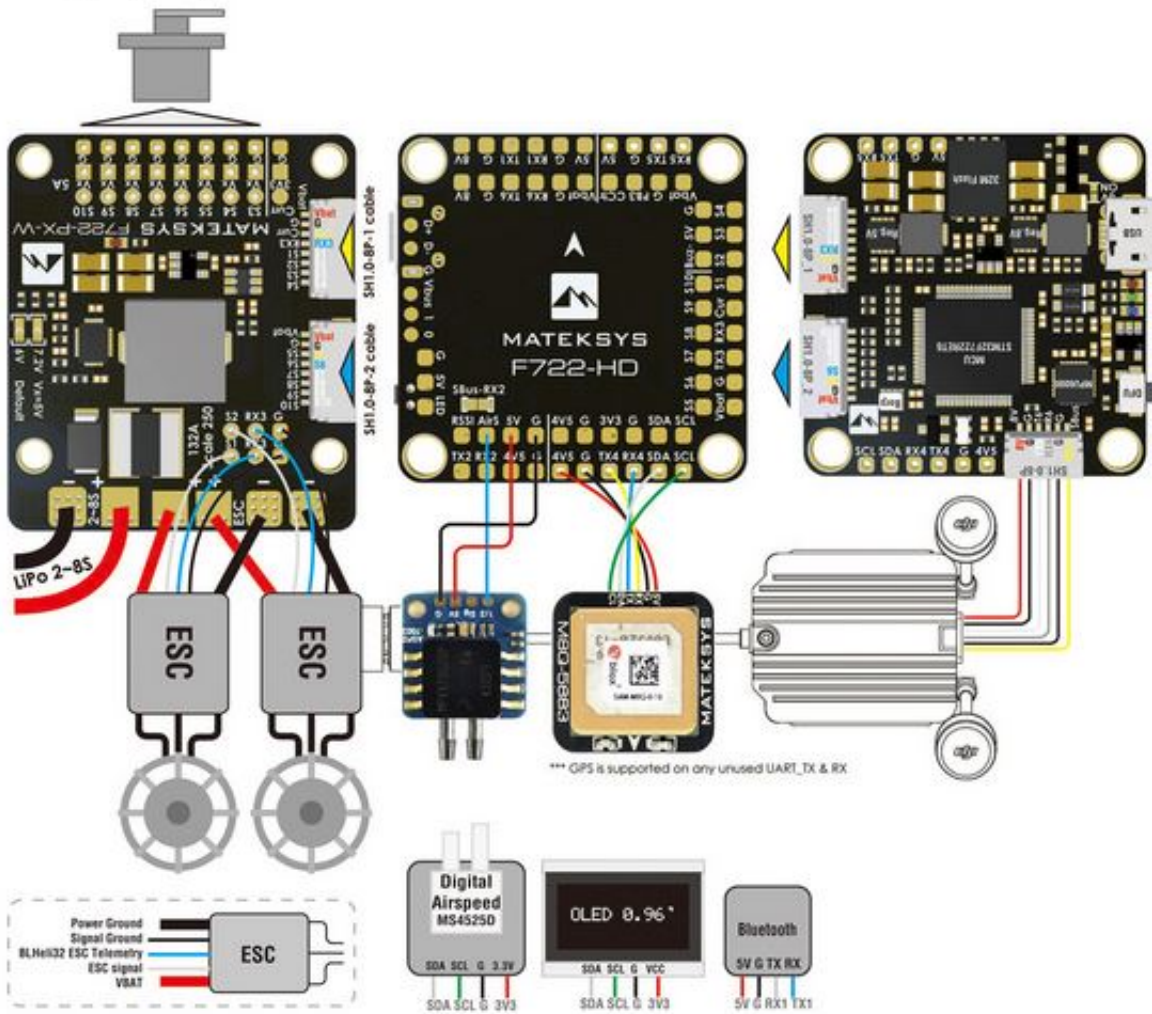

## Wiring (FrskyOSD)

