Link do produktu: https://www.nobshop.pl/kontroler-lotu-speedybee-f405-wing-app-p-3948.html



Kontroler lotu Speedybee F405 wing APP

Cena brutto	179,99 zł
Cena netto	146,33 zł
Dostępność	Aktualnie niedostępny
Czas wysyłki	1 - 3 dni
Kod producenta	SB-F405WING-APP
Producent	SpeedyBee

Opis produktu

Kontroler lotu Speedybee F405 wing APP





F405 all pins break out



Multilayer board design, stable operation



CRSF telemetry data displayed by Lua script



4x LED strip plugs, lighting with style



On-board 4-level Battery Life Indicators




On-board current sensor, with 3 BEC outputs



Includes 90°pin headers, for lower installation height




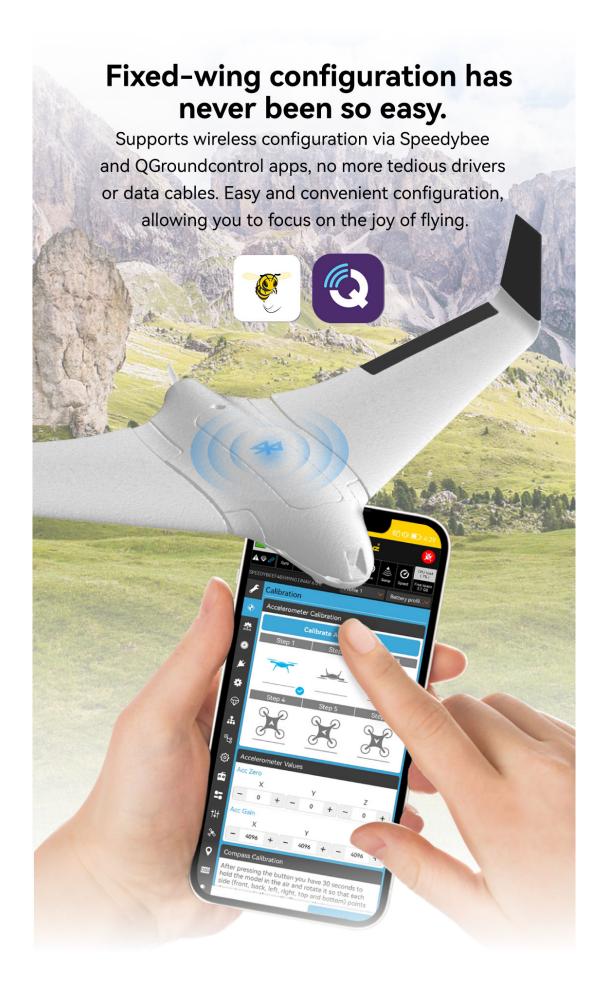



Need detailed tuning but mobile apps doesn't support? With BLE, Wi-Fi, and classic Bluetooth, there is always a way to connect that fits your needs. *Long press BOOT button for 6 seconds to switch between 4 modes: BLE, Wi-Fi, classic Bluetooth SPP, and turn off wireless.




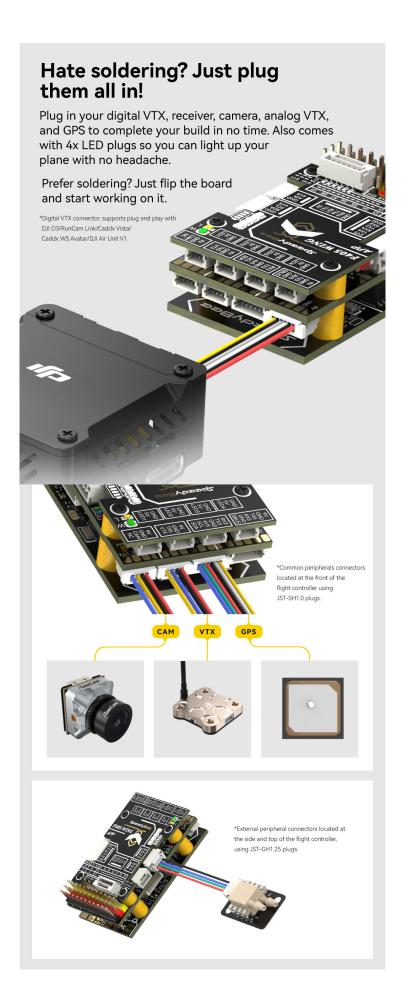







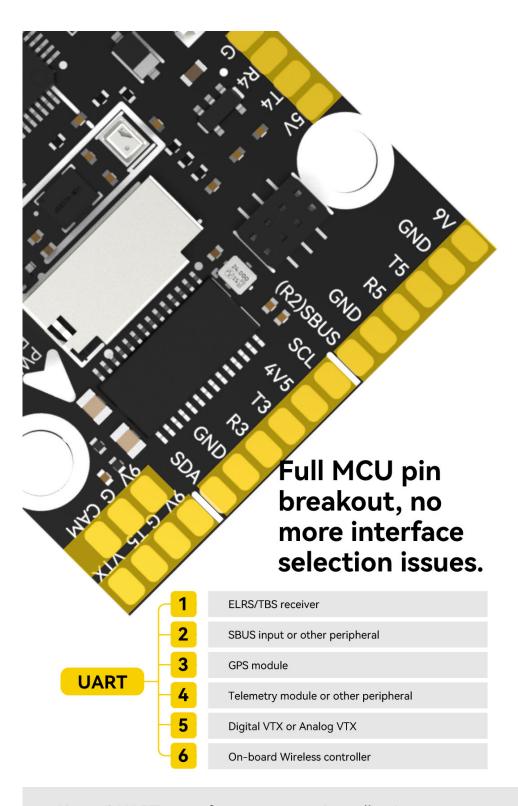

Up to 6 UART ports for easy expansion, allowing you to connect various external modules, from GPS to Digital VTX.

















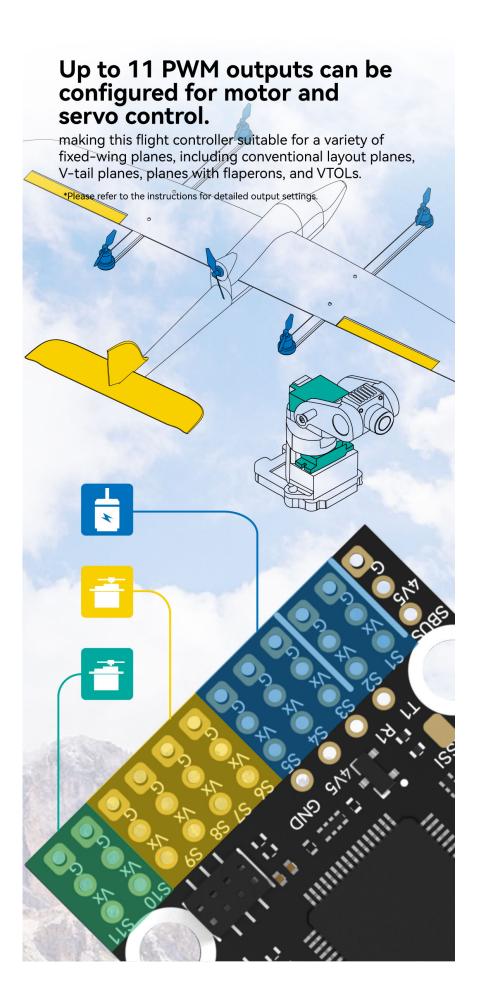




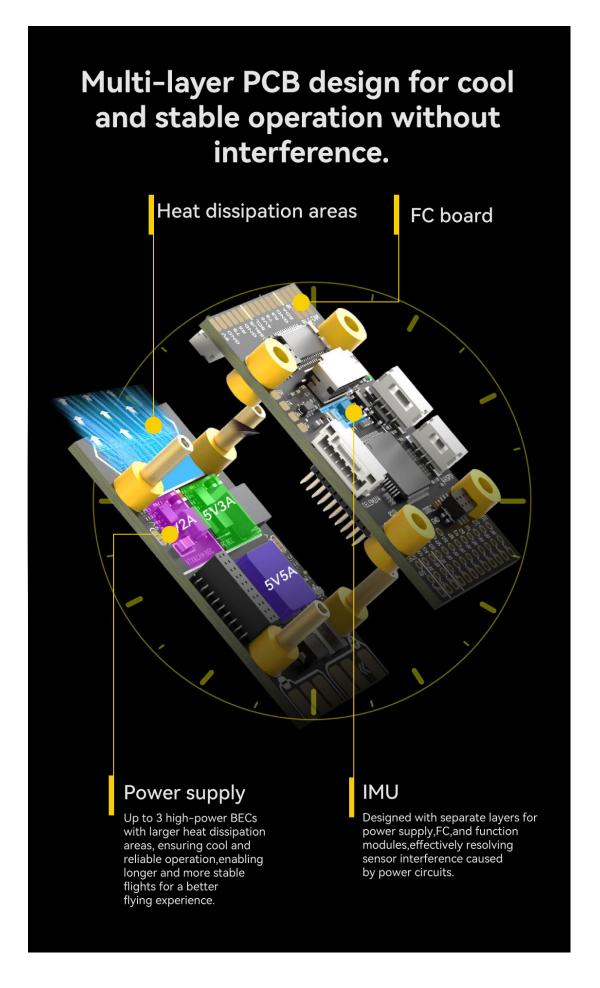








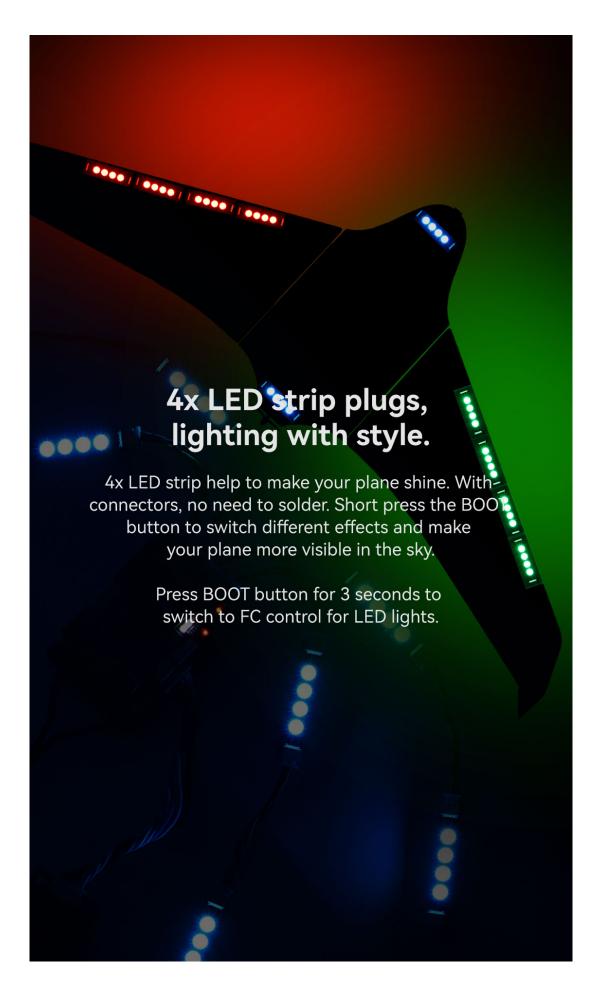



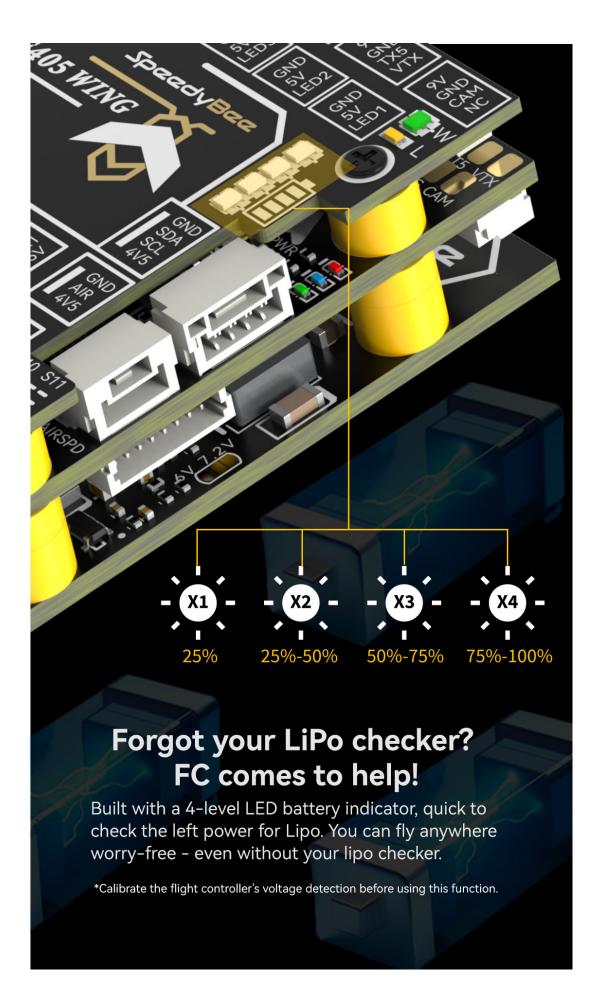

Specifications

Product Name	SpeedyBee F405 WING FC board
MCU	STM32F405,168MHz,1MB Flash
IMU(Gyro&Accelerometer)	ICM-42688-P
Barometer	SPL006-001
OSD Chip	AT7456E
Blackbox	MicroSD Card Slot
UART	6 sets(USART1, USART2, USART3, UART4, UART5, UART6(Dedicated for Wireless board Telemetry
	connection))
I2C	1x Used for magnetometer, digital airspeed sensor
ADC	4x (VBAT, Current, RSSI, Analog AirSpeed)
PWM	12x (11+1"LED"pad)
ELRS/CRSF receiver	Supported,connected to UART1
SBUS	Built in inverter for SBUS input (UART2-RX)
LED	3x LEDs for FC STATUS (Blue, Green) and 3.3V indicator(Red) 1x RGB
RSSI	Supported,Named as RS .
Supported FC Firmware	INAV:SpeedyBeeF405WING(default)ArduPilot: SpeedyBeeF405WING

Weight Product Name

Input voltage range Battery Voltage Sensor Battery Current Sensor TVS Protective diode FC BEC output

VTX BEC output

Servo BEC output

Weight

8.9g SpeedyBee F405 WING PDB board

7~36V (2~6S LiPo)

Connect to FC board VBAT, 1K:10K (Scale 1100 in iNav, BATT_VOLT_MULT 11.0 in ArduPilot) 90A continuous, 215A peak Connect to FC board Current (Scale 195 in iNav, 50 A/V in ArduPilot) Yes

Output 5.2V +/- 0.1V DC Continuous current 2.4 Amps, 3A Peak Designed for FC, Receiver, GPS module, AirSpeed module, Telemetry module, WS2812 LED_Strip
Output 9V +/- 0.1V DC Continuous current 1.8 Amps, 2.3A Peak Voltage adjustable, 9V Default, 12V

or 5V via jumper Designed for Analog Video Transmitter, Digital Video Transmitter, Camera.

Output 4.9V +/- 0.1V DC Continuous current 4.5 Amps, 5.5A Peak Voltage adjustable, 4.9V Default,

6V or 7.2V via jumper Designed for Servos.

11.4g

Product Name

Wireless Configuration (long press BOOT button for 6 seconds to switch modes)

LED strip controller (short press BOOT button to switch effects, long press 2 seconds to switch modes) On-board battery level indicator Weight

SpeedyBee F405 WING Wireless board

BLE mode, connect to Speedybee APP
Wi-Fi mode, connect to QGroundControl APP, Speedybee APP, MissionPlanner, etc.
Classic Bluetooth SPP mode, connect to QGroundControl APP, MissionPlanner
4x WS2812 LED strip connectors, adjustable colors and flashing modes
Max 5.2V 1.3A, supports around 70pcs 5050 WS2812 LED beads

4x RGB indicator LED for battery level display by number of lights 4.2q