


Dane aktualne na dzień: 21-04-2026 12:04

Link do produktu: <https://www.nobshop.pl/crazybee-f4-lite-1s-kontroler-lotu-tiny-whoop-fcescrxvtx-4in1-p-3376.html>

Crazybee F4 Lite 1s kontroler lotu tiny whoop FC/ESC/RX/VTX 4in1





Cena brutto	354,99 zł
Cena netto	288,61 zł
Dostępność	Aktualnie niedostępny
Czas wysyłki	1 - 3 dni
Producent	HappyModel

Opis produktu

Crazybee F4 Lite 1s kontroler lotu tiny whoop FC/ESC/RX/VTX 4in1

HappyModel Crazybee F4 Lite to popularna wersja kontrolera AIO przeznaczona do dronów TinyWhoop zasilanych pakietami LiPo 1S. Kontroler pracuje na procesorze F4 o taktowaniu 100MHz oraz żyroskopie MPU-6000. AIO posiada ESC 4in1 o ciągłej mocy 5A oraz chwilowej 6A, wbudowany odbiornik FrSky lub Flysky oraz nadajnik obrazu VTX o mocy 25mW. Oprócz tego kontroler posiada specjalne gniazdo umożliwiające podłączenie bezpośrednio bez lutowania kamerki FPV, np. Runcam Nano 3.

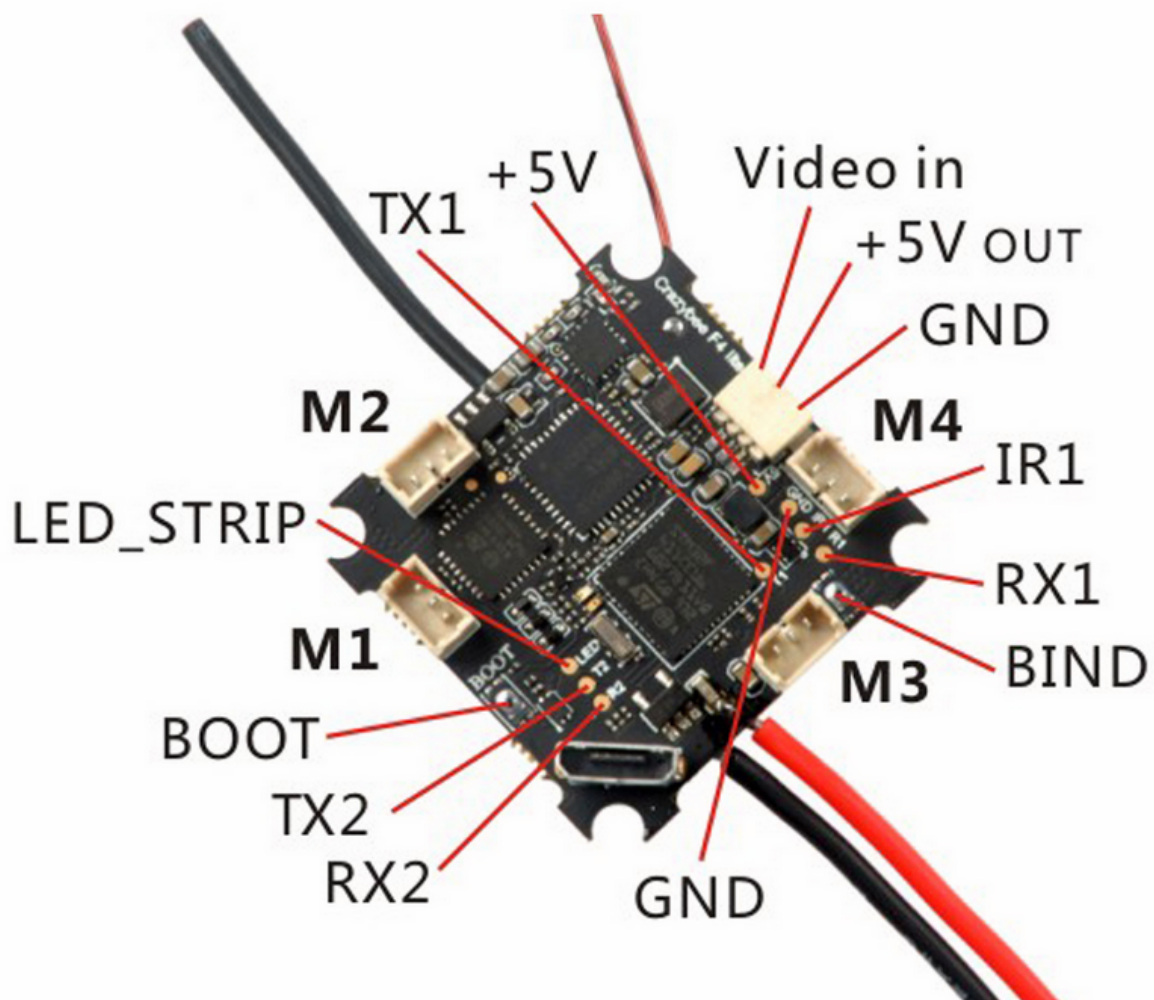

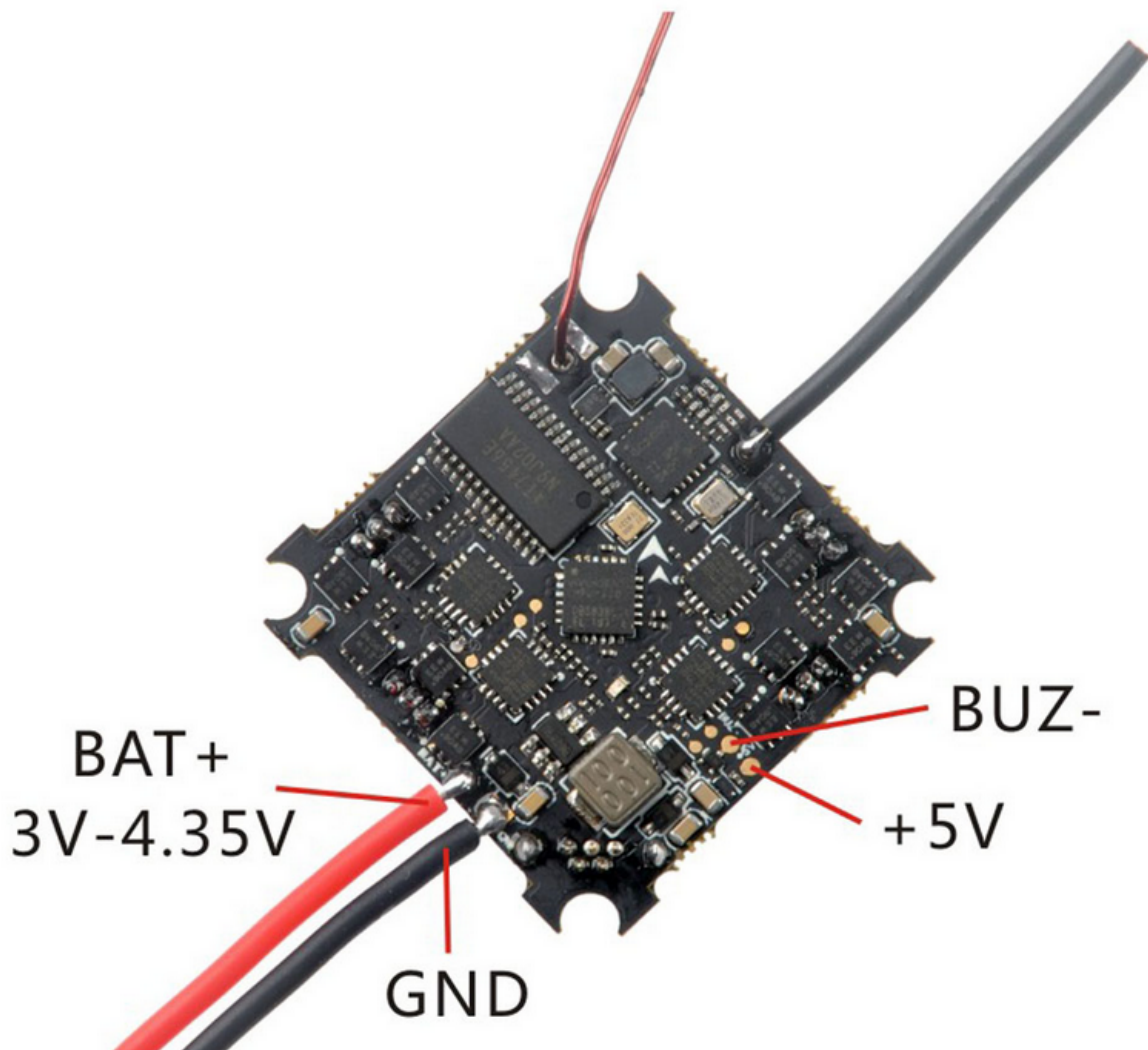

Specyfikacja:

Kontroler lotu FC

(Frsky SPI RX version) CRAZYBEE F4 Lite Frsky version Firmware target: CrazybeeF4FR
 (Flysky SPI RX version) CRAZYBEE F4 Lite Flysky version Firmware target: CrazybeeF4FS
 MCU:STM32F411CEU6 (100MHZ, 512K FLASH)
 Sensor: MPU-6000(SPI connection)
 Board size: 28.5 * 28.5MM
 Power supply: 1S battery input (DC 2.9V-4.35V)
 Built-in 5A(each) BLheli_S 4in1 ESC Dshot600 ready
 Built-in Betaflight OSD(SPI Control)
 Built-in 5.8G VTX
 Built-in SPI Frsky/Flysky receiver
 Built-in 5V 1A BEC
 Built-in voltage detection

ESC 4in1

MCU upgraded to EFM8BB21
 Power supply: 1S LiPo/LiPo HV
 Current: 5A continuous peak 6A (3 seconds)
 Support BLHeliSuite programmable
 Factory firmware: O_H_5_REV16_7.HEX
 Default protocol: DSHOT600

Odbiornik RC Frsky SPI D8

SPI BUS receiver Frsky D8 compatible
 Compatible Non EU transmitter D8 model
 Channels: 8ch
 Failsafe support

Odbiornik RC Flysky SPI

No ground interference (Transmitter and receiver 1 m from the ground): 100m~200m
SPI BUS receiver

Protocol: AFHDS and AFHDS-2A Switchable

Channels: 8ch(AFHDS) or 14ch(AFHDS-2A)

No ground interference (Transmitter and receiver 1 m from the ground): 100~200m

Nadajnik obrazu 5.8g VTX

Failsafe support

Output power: 25mw

Frequency: 40CH

Input voltage: 3.3V 5.5V

Current consumption: 300mA(type)

Frequency: 5.8GHz 5bands 40 channels

With Race band

Smartaudio ready

Produkt posiada dodatkowe opcje:

Wersja odbiornika: FrSky