


Link do produktu: <https://www.nobshop.pl/kontroller-lotu-fc-fettec-kiss-fc-g4-n-p-3320.html>

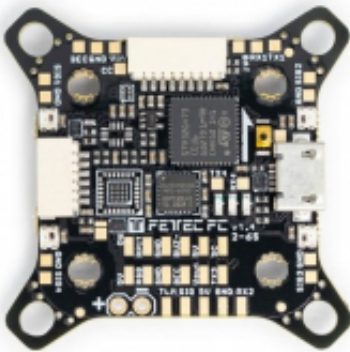

## Kontroller lotu FC FETtec KISS FC G4-N

Cena brutto	<b>365,99 zł</b>
Cena netto	<b>297,55 zł</b>
Dostępność	<b>Aktualnie niedostępny</b>
Czas wysyłki	<b>1 - 3 dni</b>
Producent	<b>FetTec</b>

### Opis produktu

#### Kontroller lotu FC FETtec KISS FC G4-N

Wersja N - bez OSD

#### Product information "FETtec FC G4 - N"

What does "N" version mean?

This product has **no onboard analog OSD.**

**Except for the removed analog OSD, there are no restrictions and you can use the full potential of our fc as you are used to.**

**Use with other OSDs/ digital FPV systems is still possible as usual.**

#### Features:

- Latest STM32G4 Processor
  - 170Mhz + Math accelerator
  - MPU6000
- Supply voltage 6-27V (2S-6S Lipo)
- 2x dedicated onboard BEC (max. 600mA each)
  - 5V BEC for RX
  - 5V/16V BEC for VTX (switchable and real Pit\*)
- 2x 8 pin connector for solder free ESC connection
  - Connector 1: ESC signal 1-4, telemetry, VCC, GND

- 
- Connector 2: ESC signal 5-8 (depending on UAV type 1-4), telemetry, VCC, GND
  - 1x 8 pin connector for solder free VTX, cam connection and OSD or digital systems
    - real Pit\* VCC, GND, Video in, Video out, BEC 5V/16V, VCS/TX3, RX3
  - 2x 6 pin connectors for serials
    - RX1, TX1, 3.3V, VCC, 5V, GND
    - RX3, VCS/TX3, RGB LED, VCC, 5V, GND
  - 1x 4 pin connector for receiver
    - Signal, TLM, 5V, GND
  - 5 UART serials
    - UART 1 free
    - UART 2 used for Receiver
    - UART 3 free
    - UART 4 free
    - UART 5 used for ESCs / TLM / Onewire
  - 4 ESC solder pads (Signal/GND) in each corner
  - Buzzer pads
  - 4 tiny RGB LEDs (selectable color)
  - Supported ESC protocols
    - PWM, Oneshot125, Oneshot42, Dshot150/300/600/1200/2400, FETtec Onewire
  - FETtec KISS firmware
  - Connector type: JST-SH-1mm

\*real Pit-Mode: A power supply pin which is remotely switchable

#### Dimensions:

- Maximum outside dimensions: 37,2 x 37,2mm, without outside tips 30 x 30mm
- Mounting hole arrangement:
  - 20 x 20mm with M2 mounting hole (expandable to M3)
  - 30 x 30mm with M3 mounting hole
  - 30 x 30mm mounting hole tips are removable to reduce overall FC size

- 
- Overall height: 7,9mm
  - Weight: 5,37g

**Firmware:**

- KISS Firmware

**Scope of delivery:**

- 1x FETtec FC G4 N
- 1x 8 pin cable (open on one side)
- 1x 6 pin cable (open on one side)
- 1x 4 pin cable (open on one side)

**Available downloads:**

- [Download FETtec FC G4 - N manual](#)
- please check for newer version at [Fettec](#) site