
Dane aktualne na dzień: 05-11-2026 17:26

Link do produktu: https://www.nobshop.pl/kontroller-lotu-fc-fettec-kiss-fc-g4-n-p-3320.html

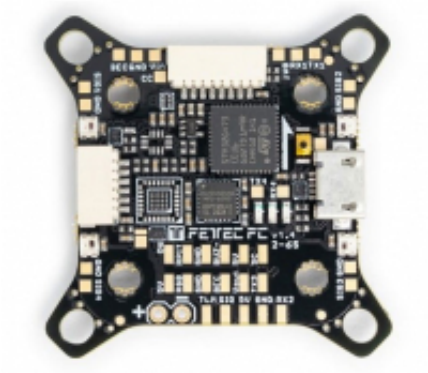

Kontroller lotu FC FETtec KISS FC G4-N

Cena brutto	**365,99 zł**
Cena netto	**297,55 zł**
Dostępność	**Aktualnie niedostępny**
Czas wysyłki	**1 - 3 dni**
Producent	**FetTec**

Opis produktu

Kontroller lotu FC FETtec KISS FC G4-N

Wersja N - bez OSD

Product information "FETtec FC G4 - N"

What does "N" version mean?

This product has **no onboard analog OSD.**

Except for the removed analog OSD, there are no restrictions and you can use the full potential of our fc as you are used to.
Use with other OSDs/ digital FPV systems is still possible as usual.

Features:

- Latest STM32G4 Processor
  - 170Mhz + Math accelerator
  - MPU6000
- Supply voltage 6-27V (2S-6S Lipo)
- 2x dedicated onboard BEC (max. 600mA each)
  - 5V BEC for RX
  - 5V/16V BEC for VTX (switchable and real Pit*)
- 2x 8 pin connector for solder free ESC connection
  - Connector 1: ESC signal 1-4, telemetry, VCC, GND

    - Connector 2: ESC signal 5-8 (depending on UAV type 1-4), telemetry, VCC, GND
- 1x 8 pin connector for solder free VTX, cam connection and OSD or digital systems
    - real Pit* VCC, GND, Video in, Video out, BEC 5V/16V, VCS/TX3, RX3
- 2x 6 pin connectors for serials
    - RX1, TX1, 3.3V, VCC, 5V, GND
    - RX3, VCS/TX3, RGB LED, VCC, 5V, GND
- 1x 4 pin connector for receiver
    - Signal, TLM, 5V, GND
- 5 UART serials
    - UART 1 free
    - UART 2 used for Receiver
    - UART 3 free
    - UART 4 free
    - UART 5 used for ESCs / TLM / Onewire
- 4 ESC solder pads (Signal/GND) in each corner
- Buzzer pads
- 4 tiny RGB LEDs (selectable color)
- Supported ESC protocols
    - PWM, Oneshot125, Oneshot42, Dshot150/300/600/1200/2400, FETtec Onewire
- FETtec KISS firmware
- Connector type: JST-SH-1mm

*real Pit-Mode: A power supply pin which is remotely switchable

Dimensions:

- Maximum outside dimensions: 37,2 x 37,2mm, without outside tips 30 x 30mm
- Mounting hole arrangement:
    - 20 x 20mm with M2 mounting hole (expandable to M3)
    - 30 x 30mm with M3 mounting hole
    - 30 x 30mm mounting hole tips are removable to reduce overall FC size

- Overall height: 7,9mm
- Weight: 5,37g

Firmware:

- KISS Firmware

Scope of delivery:

- 1x FETtec FC G4 N
- 1x 8 pin cable (open on one side)
- 1x 6 pin cable (open on one side)
- 1x 4 pin calbe (open on one side)

Available downloads:

- Download FETtec FC G4 - N manual
- please check for newer version at Fettec site