Dane aktualne na dzień: 25-11-2026 04:59

Link do produktu: https://www.nobshop.pl/ladowarka-goaldern-f6-smart-charger-500w-20a-1-6s-p-3128.html



Ładowarka GoalDern F6 Smart Charger 500W / 20A 1-6S

Cena brutto	**383,99 zł**
Cena netto	**312,19 zł**
Dostępność	**Dostępność - 3 dni**
Czas wysyłki	**1 - 3 dni**
Producent	**GoalDern**

Opis produktu



The New F Series Portable Smart Charger

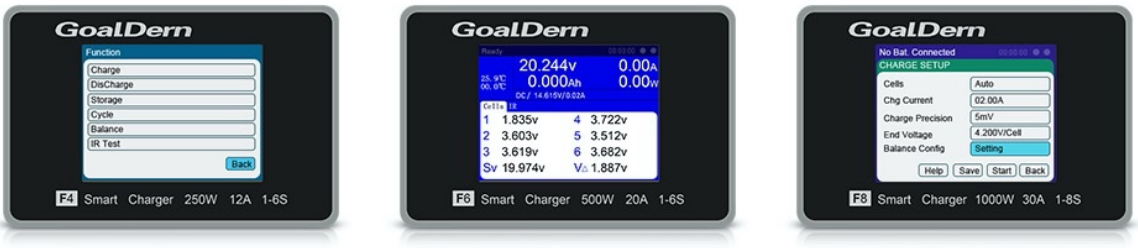

Multiple Functions in One Device

Charge Function

Discharge Function

Balance

Storage

Cycle function

IR Test

Power Supply



High Power but in Smaller Size

High power and current to increase charge speed, and easy for traveling with it by the compact size.

98 x 65 x 40 mm
Compact

250g
Lightweight

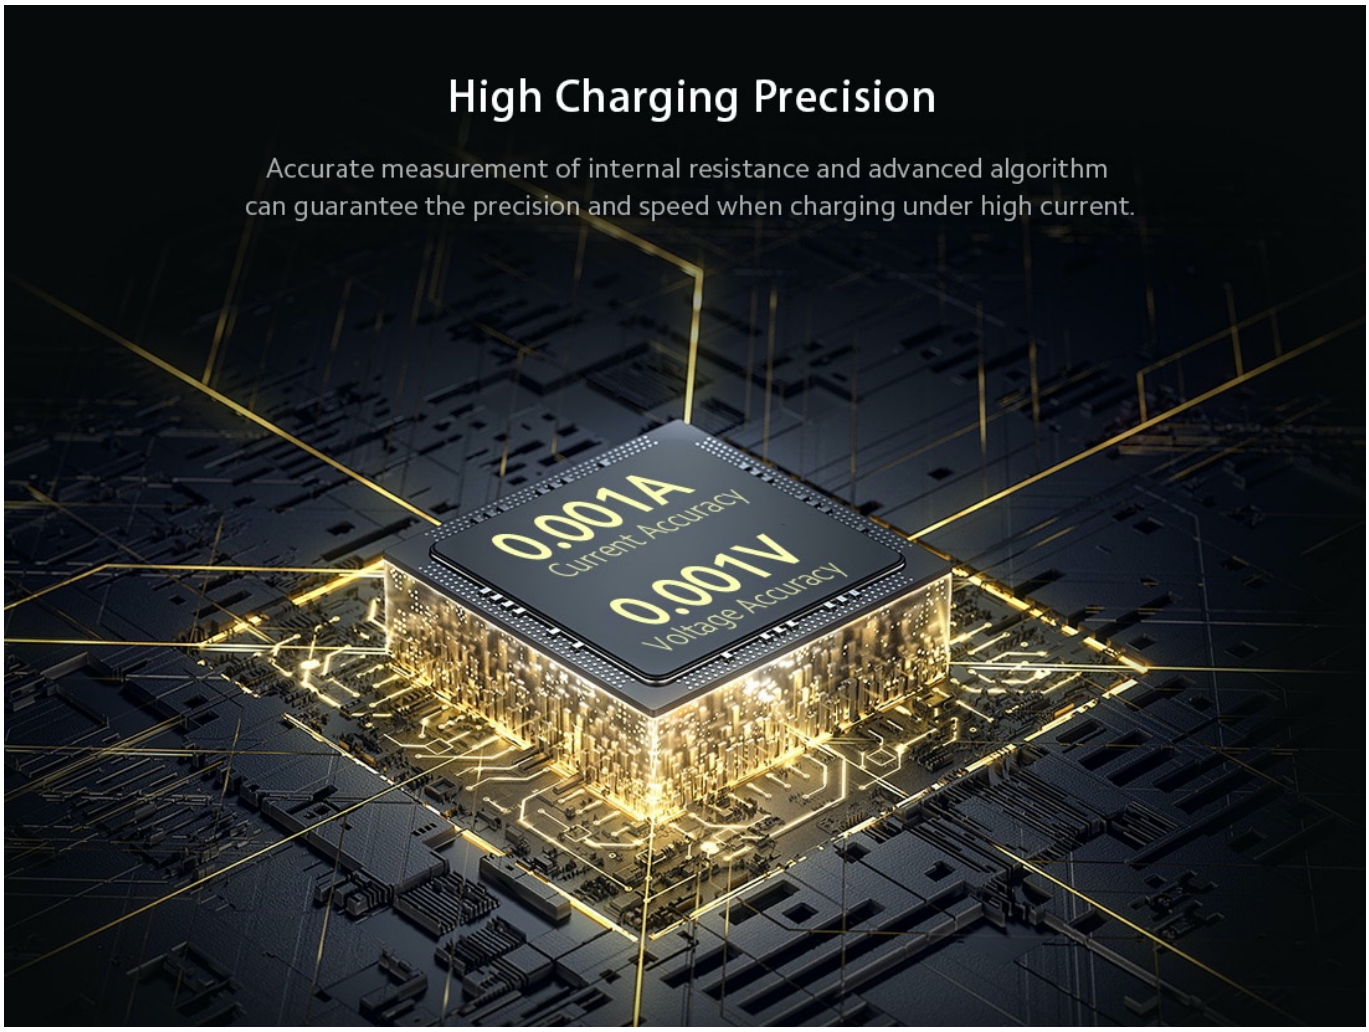
High Charging Precision
Accurate measurement of internal resistance and advanced algorithm
can guarantee the precision and speed when charging under high current.
0.001A
Current Accuracy
0.001V
Voltage Accuracy


Multiple Protections for Worry-free Use
With DC 9-30V input, Users can choose power supply or
battery packs as input power at will without worrying about burning issues. Meanwhile,
the discharging way from balance port can avoid the main circuit failure.
Over current protection
Over voltage protection
Short circuit protection
Over temperature protection
Reverse protection
GoalDern
Function
Charge
DisCharge
Storage
Cycle
Balance
IR Test
Back
F6 Smart Charger 500W 20A 1-6S


Easy Operation for Different Users
Simple and clear menu design makes the operation much easier by single scroll wheel, and users can charge batteries even without the manual. Multiple options of parameter setting can meet the requirements of different users.
GoalDern
No Bat. Connected
CHARGE SETUP
Cells
Auto
Chg Current
02.00A
Charge Precision
5mV
End Voltage
4.200V/Cell
Balance Config
Setting
Help
Save
Start
Back
F6 Smart Charger 500W 20A 1-6S

2.4″ IPS Screen

The IPS screen features fast response, 178° visible angle,
true color and low power consumption.




High Efficiency of
Temperature Control System
Built-in internal temperature sensor and
cooling fan to ensure the charger in cool
and efficient working condition.

Upgradeable Firmware

By connecting the charger USB port to the PC, the latest firmware can be acquired, ensuring the charger have the optimized performance all the time.



F6 Specifications

Input voltage:	9-30V DC	Display:	2.4 inch IPS LCD
Max charge power:	500W	Operating temperature:	0~40°
Charge current:	0.1~20A	Storage temperature:	- 20~60°
Max discharge power:	50W	Dimensions:	98 x 65 x 40 mm
Regenerated discharge current:	0.1~20A	Weight:	250g
Balance current:	2A		
Supported battery type:	LiFe, Lilon, LiPo, LiHv 1~6S		
	NiMh/ NiCd 1~16S		
	Pb 1~12S		