

Link do produktu: <https://www.nobshop.pl/ladowarka-goaldern-f6-smart-charger-500w-20a-1-6s-p-3128.html>

Ładowarka GoalDern F6 Smart Charger 500W / 20A 1-6S



Cena brutto	383,99 zł
Cena netto	312,19 zł
Dostępność	Dostępność - 3 dni
Czas wysyłki	1 - 3 dni
Producent	GoalDern

Opis produktu

F6
20A 500W

Multifunctional Smart
Balance Charger / Discharger

1~6S
LiFe, LiIon, LiPo, LiHv

1~16S
NiMH/ NiCd

2~30V
Pb

CE FC RoHS

GoalDern
F6 Smart Charger 500W 20A 1-6S


20.244v
0.000Ah
0.000W

25.9V
0V.0V


5C / 14.8719V / 0.922A

Cell	V	A	V
1	1.835V	4	3.722V
2	3.603V	5	3.512V
3	3.619V	6	3.682V
Sv	19.974V	V _Δ 1.887V	

The New F Series Portable Smart Charger

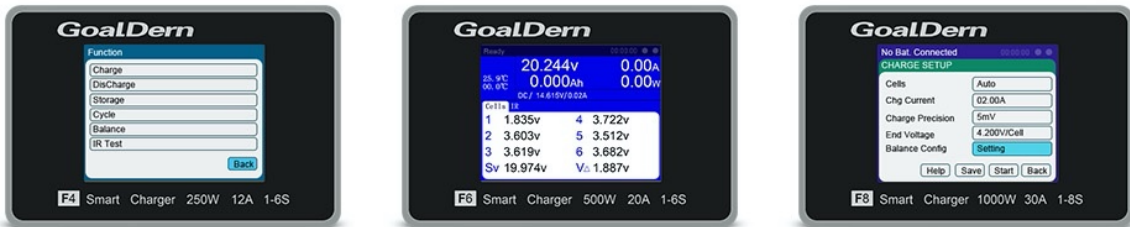

Multiple Functions in One Device

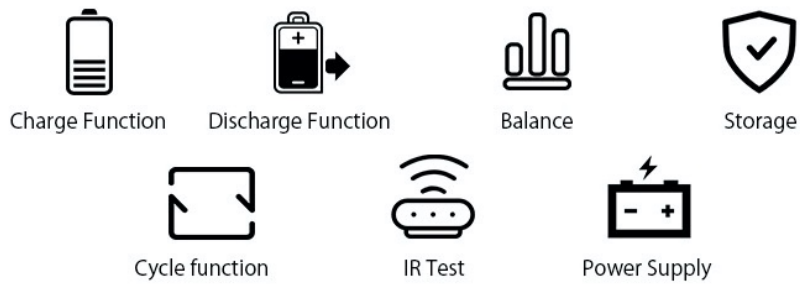

High Power but in Smaller Size

High power and current to increase charge speed, and easy for traveling with it by the compact size.

98 x 65 x 40 mm


Compact

250g

Lightweight

High Charging Precision

Accurate measurement of internal resistance and advanced algorithm can guarantee the precision and speed when charging under high current.

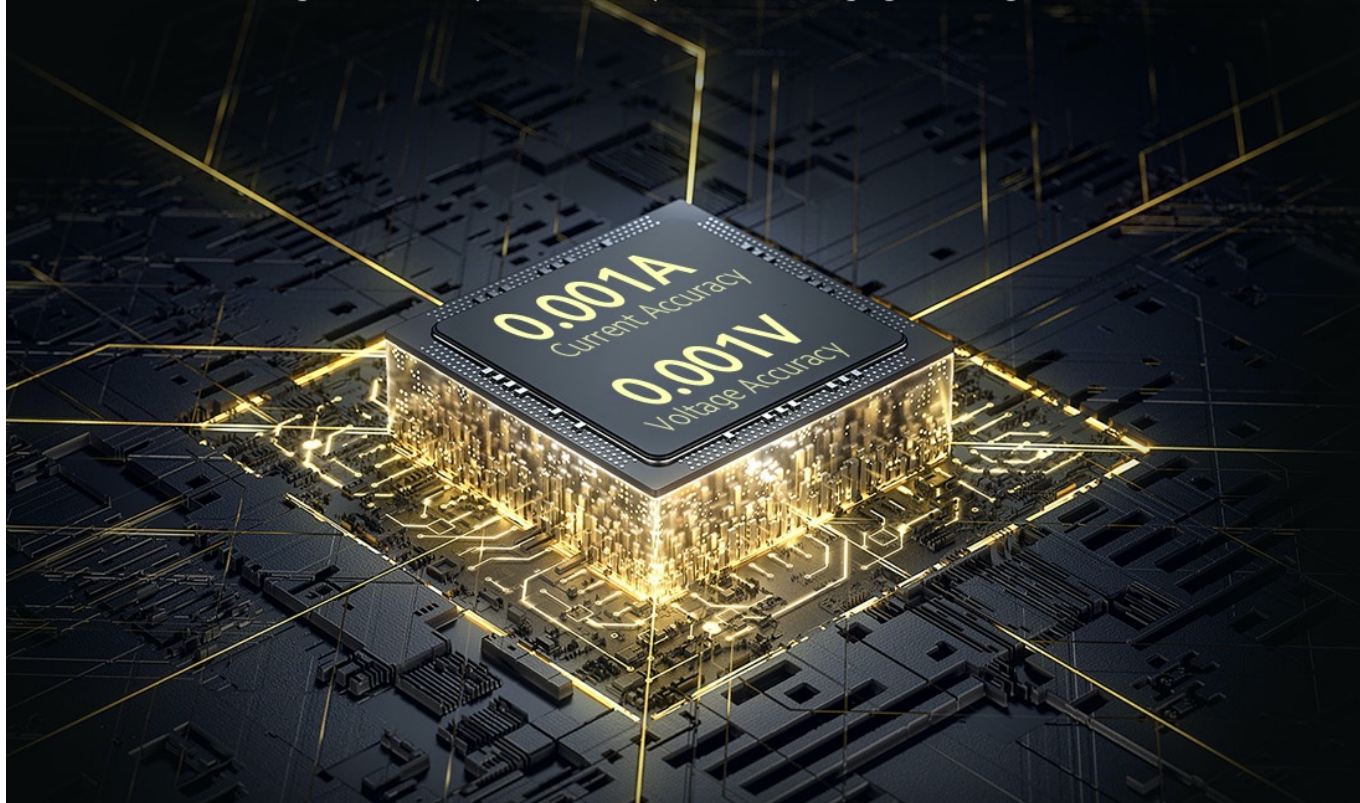

Multiple Protections for Worry-free Use

With DC 9-30V input, Users can choose power supply or battery packs as input power at will without worrying about burning issues. Meanwhile, the discharging way from balance port can avoid the main circuit failure.



Over current protection



Over voltage protection



Short circuit protection



Over temperature protection



Reverse protection




Easy Operation for Different Users

Simple and clear menu design makes the operation much easier by single scroll wheel, and users can charge batteries even without the manual. Multiple options of parameter setting can meet the requirements of different users.



2.4" IPS Screen

The IPS screen features fast response, 178° visible angle, true color and low power consumption.

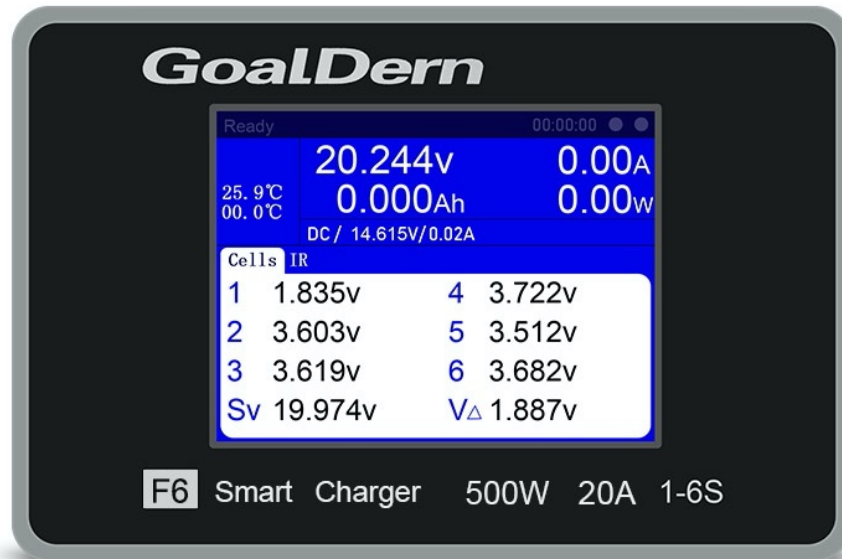

High Efficiency of Temperature Control System

Built-in internal temperature sensor and cooling fan to ensure the charger in cool and efficient working condition.



Upgradeable Firmware

By connecting the charger USB port to the PC, the latest firmware can be acquired, ensuring the charger have the optimized performance all the time.



F6 Specifications

Input voltage:	9-30V DC	Display:	2.4 inch IPS LCD
Max charge power:	500W	Operating temperature:	0~40°
Charge current:	0.1~20A	Storage temperature:	-20~60°
Max discharge power:	50W	Dimensions:	98 x 65 x 40 mm
Regenerated discharge current:	0.1~20A	Weight:	250g
Balance current:	2A		
Supported battery type:	LiFe, Lilon, LiPo, LiHv 1~6S		
	NiMh/ NiCd 1~16S		
	Pb 1~12S		