

Link do produktu: <https://www.nobshop.pl/lutownica-hglrc-rc1-p-4099.html>



Lutownica HGLRC RC1

Cena brutto	180,00 zł
Cena netto	146,34 zł
Dostępność	Aktualnie niedostępny
Czas wysyłki	1 - 3 dni
Kod producenta	C.PJ.06.00060
Producent	HGLRC

Opis produktu

Lutownica HGLRC RC1

Features:

- the max temperature is 500°C/842°F.
 - Working power supply: support PD3.0, QC2.0, DC12V-25V, 3S-6S battery.
 - 0.91-inch OLED display, the brightness display can be adjusted.
 - Built-in buzzer reminder, automatically heats up when powered on, and can be turned on and off as you choice.
 - Intelligent temperature control algorithm, supports temperature compensation and temperature self-calibration.
 - The shell is made of translucent high temperature resistant and fireproof PC environmental protection material
 - Sensitivity can be set to reject interference from environmental factors.
 - Support °C/°F switching, left and right hand screen flip.
 - Low voltage protection, high temperature and high voltage alarm, safe and reliable.
 - Support Chinese and English display switching, firmware upgrade.
 - C210 Tip, Suitable for precision maintenance.
 - Compact and very portable, suitable for use in multiple venues.
- Size specification: 118mm * 13.5mm, 146mm with mounted soldering tip
Weight: 23.6g




HGLRC RC1 Soldering Iron

Intelligent temperature



Intelligent Temperature Control Algorithm

Heat up rapidly
Instant tin melting, greatly improving work efficiency

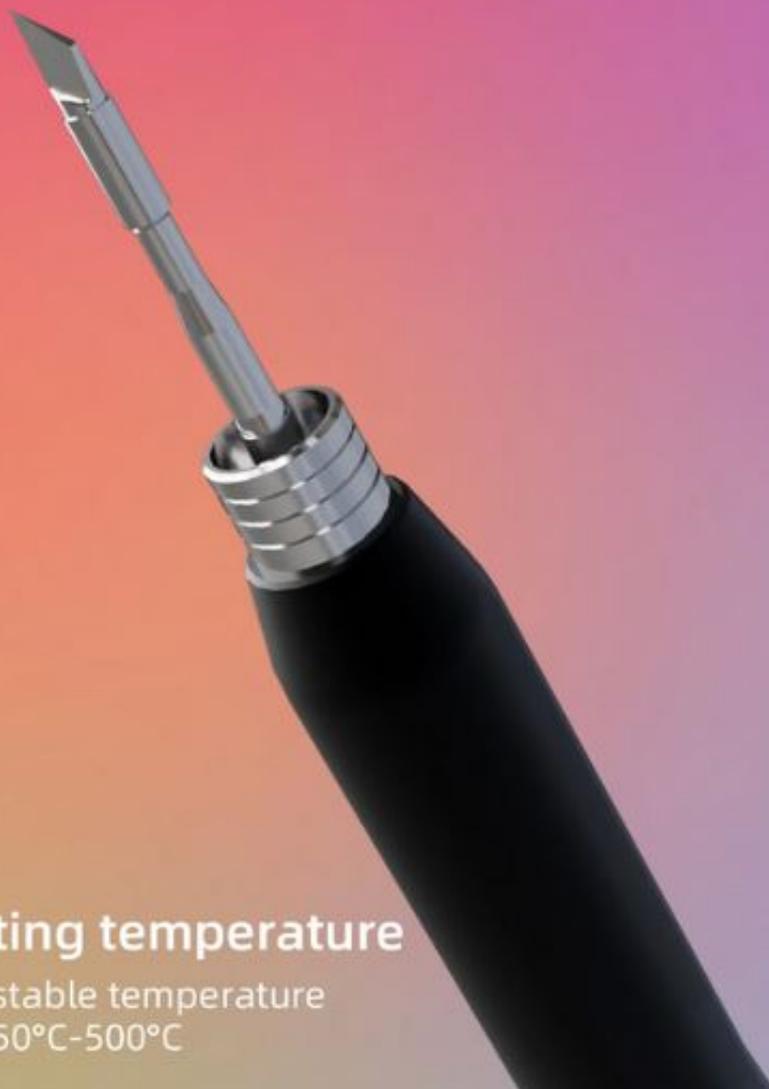

Operating temperature

The adjustable temperature range is 50°C-500°C

Part structure

