Dane aktualne na dzień: 04-11-2026 04:47

Link do produktu: https://www.nobshop.pl/silnik-emax-gtii-2212c-p-4743.html

Silnik EMAX GTII 2212C



Cena brutto	**89,99 zł**
Cena netto	**73,16 zł**
Dostępność	**Dostępny**
Czas wysyłki	**1 - 3 dni**
Producent	**EMAX**


Opis produktu

Silnik EMAX GTII 2212C

Specyfikacje:
Uzwojenie: 12N14P
Długość: 39mm
Średnica: 27.7mm
Wał: 3mm
Zasilanie: 1000KV: 2-4S / 1400KV: 2-4S / 2450KV: 2-3S
Śmigło:1000KV: 8"-10" / 1400KV: 7"-9" / 2450KV: 5"-6"
Waga silnika: 50.5g 1000KV / 50.5g 1400KV / 51. 9g 2450KV

Cechy:
Precyzyjne łożyskowanie
Stalowy wał
Anodowanie
19*16mm rozstaw otworów
Uzwojenie wielopasmowe
Bezpośredni wylot 70mm

Pakiet zawiera:
5x Śruba M3*6
3x Złącze męskie 3,5mm (banany)
3x Rurka termokurczliwa 4,5mm
1x Podkładka i śruba do wału
1x Adapter śmigła M6
1x Mocowanie silnika

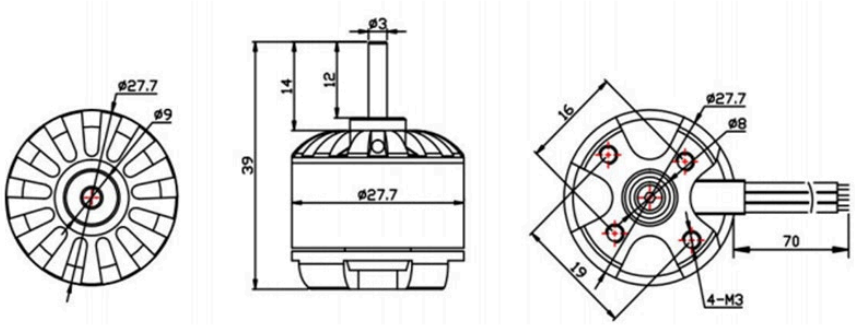

Specifications			
Testltem	KV930	Idle Current (10V)	0.55A
Motor Dimensions	ϕ27.7*39mm	Internal Resistance	133mΩ
Framework	12N14P	No.of cells	2-4S
Bearing Shaft	3mm	Propeller	8″-10″
Outlet length	Direct outlet 70mm	Peak Current (4S)	23.2A
Motor weight	50.5g	Max.Power (4S)	343.36W

Testltem	KV1000	Idle Current (10V)	0.6A
Motor Dimensions	ϕ27.7*39mm	Internal Resistance	116mΩ
Framework	12N14P	No.of cells	2-4S
Bearing Shaft	3mm	Propeller	8″-10″
Outlet length	Direct outlet 70mm	Peak Current (4S)	28.6A
Motor weight	50.5g	Max.Power (4S)	423.28W

Testltem	KV1400	Idle Current (10V)	1.0A
Motor Dimensions	ϕ27.7*39mm	Internal Resistance	65mΩ
Framework	12N14P	No.of cells	2-4S
Bearing Shaft	3mm	Propeller	7″-9″
Outlet length	Direct outlet 70mm	Peak Current (4S)	33A
Motor weight	50.5g	Max.Power (4S)	488.4W

Testltem	KV1800	Idle Current (10V)	1.45A
Motor Dimensions	ϕ27.7*39mm	Internal Resistance	39mΩ
Framework	12N14P	No.of cells	2-3S
Bearing Shaft	3mm	Propeller	6″-8″
Outlet length	Direct outlet 70mm	Peak Current (3S)	49.5A
Motor weight	51g	Max.Power (3S)	549.45W

Testltem	KV2200	Idle Current (10V)	1.85A
Motor Dimensions	ϕ27.7*39mm	Internal Resistance	29mΩ
Framework	12N14P	No.of cells	2-3S
Bearing Shaft	3mm	Propeller	5″-7″
Outlet length	Direct outlet 70mm	Peak Current (3S)	45.2A
Motor weight	51.3g	Max.Power (3S)	501.72W

Testltem	KV2450	Idle Current (10V)	2.3A
Motor Dimensions	ϕ27.7*39mm	Internal Resistance	25mΩ
Framework	12N14P	No.of cells	2-3S
Bearing Shaft	3mm	Propeller	5″-6″
Outlet length	Direct outlet 70mm	Peak Current (3S)	30A
Motor weight	51.9g	Max.Power (3S)	333W

Produkt posiada dodatkowe opcje:

KV: 1000KV , 1400KV , 2450KV