

Link do produktu: <https://www.nobshop.pl/speedybee-adapter-3-ladowarka-adapter-usb-bt-lipo-checker-p-4362.html>



SpeedyBee Adapter 3 - ładowarka, adapter USB - BT, LiPo checker

Cena brutto	169,99 zł
Cena netto	138,20 zł
Dostępność	Dostępny
Czas wysyłki	1 - 3 dni
Producent	SpeedyBee

Opis produktu

SpeedyBee Adapter 3

Specyfikacja:

Zakres napięcia wejściowego: 1S-6S (Powyżej 3.8V dla 1S),

Złącze wejścia zasilania: XT60 męskie, PH2.0 męskie,

Wymagana wersja systemu smartfona: Android 7.0+ | iOS 12.0+,

Obsługiwana wersja aplikacji SpeedyBee: V1.6.1 + for iOS | V1.5.6+ for Android,

Obsługiwane oprogramowania:

- Betaflight od 3.2.0,
- iNAV od 2.0.0,
- EmuFlight od 0.1.0,
- Ardupilot,

Maksymalny prąd wyjściowy dla kontrolerów lotu: 700mA @5V,

Złącze szybkiego ładowania: USB-A,

Minimalne napięcie wejściowe wymagane do ładowania: 7.4V(2S LiPo),

Protokoły szybkiego ładowania:

- QC3.0/QC2.0
- AFC
- FCP
- SCP/High SCP
- PE2.0/PE1.1
- SFCP

Maksymalny prąd szybkiego ładowania: 3.5A,

Maksymalna moc szybkiego ładowania: 30W,

Długość przewodu: 12.4cm.



SPEEDYBEE
ADAPTER 3

NO LAPTOP, NO POWER BANK, AND NO LIPO
CHECKER IN YOUR FPV BAG.

Wireless Firmware
Flasher/Configurator

Wireless Blackbox
analyzer

Wireless ESC flasher

30W Fast USB
charger


1S -6S LiPo Checker


Compatible with
iOS & Android



Turn your smartphone into your mobile FPV companion

Connect to the SpeedyBee mobile app, and configure your flight controller anytime, anywhere. Or flash the latest version of Betaflight/Emuflight/INAV in just 2 minutes before your flight session. The choice is yours.

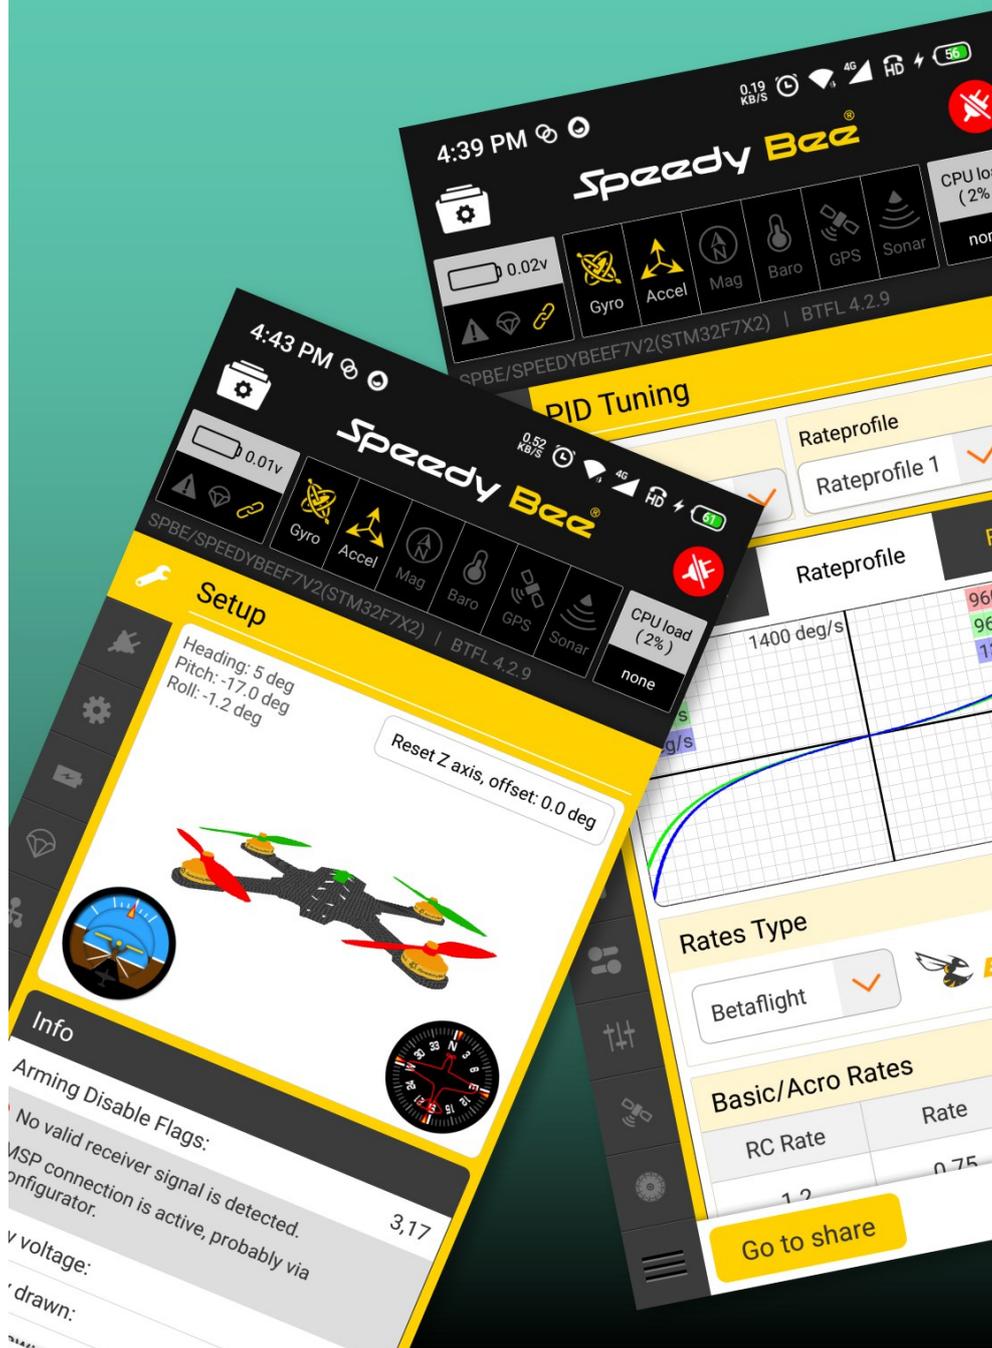

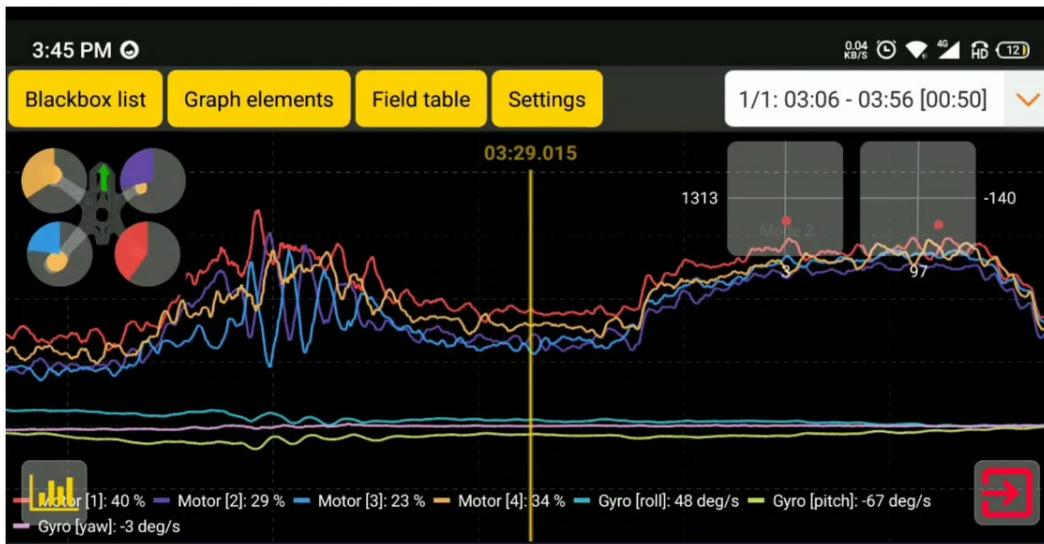

Analyzing Blackbox data has never been easier

No laptop, no separate app, no hassle. Connect your quad to the SpeedyBee mobile app and analyze your Blackbox data* in just 1.5 minutes after a flight. Get the most out of your practice sessions now.

*Currently supports Betaflight and Emuflight only



Your LiPo batteries = Powerful 30W power banks

Connect SpeedyBee Adapter 3 to a LiPo battery and charge your mobile phone* and tablets when you need them the most. Supports mainstream QC3.0/AFC/Apple 2.4A (iPhone 6s and above) and other fast charging protocols with charging power up to 30W. Complete with over-current protection, short-circuit protection and over-temperature protection to protect your gadgets from unwanted accidents.

Phone Model	Battery Capacity	Battery level after half an hour of charging
Mi 11 Ultra	5000mAh	52%
Samsung S10	3400mAh	49%
HUAWEI P40 Pro	4400mAh	45%
iPhone 11	3110mAh	22%

*Charging function requires 2S LiPo and above.



Forgot your LiPo checker? Worry not

Connect your 1S - 6S LiPo and the display will immediately show your battery voltage and the remaining power with a specific colour code*. The built-in beeper will alert you if the remaining power is less than 40% to help extend your battery lifespan.

*GREEN(>80%), WHITE(40-80%) and RED(<40%).



MicroUSB or Type C? Why not both?

SpeedyBee Adapter 3 comes with a dual-head data cable, with MicroUSB 2.0 and USB 3.0 Type C connector on each end. No more worries about connector compatibility regardless of what flight controller you are using in your build.



WiFi + Bluetooth = the best of both worlds

Use Bluetooth for quick access to your firmware configurator, or switch to Wi-Fi to flash firmware or download Blackbox data at a higher speed.



And all you need is just one LiPo

Access the configurator function using any LiPo batteries available to you. Supports all 1S - 6S LiPo with PH2.0 or XT60 connectors. Plug in that beefy 6S 1500mah, or that tiny 1S Whoop battery (minimum voltage 3.8V), to the SpeedyBee Adapter 3 you are ready to access the configurator.



Note: When using a BT2.0 battery to power the Adapter 3 via the PH2.0 port, please ensure the polarity is correct (Left for - and right for +, if reverse the polarity, Adapter 3 will be burned.)



