


Dane aktualne na dzień: 21-06-2026 10:17

Link do produktu: <https://www.nobshop.pl/walksnail-avatar-hd-mini-1s-kit-p-3498.html>

## Walksnail AVATAR HD Mini 1S Kit

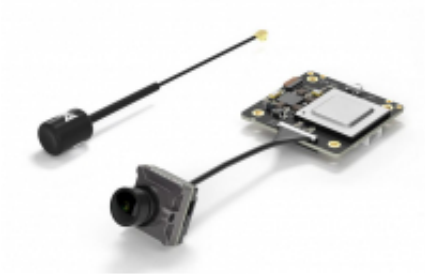

Cena brutto	<b>499,99 zł</b>
-------------	------------------

Cena netto	<b>406,50 zł</b>
------------	------------------

Cena poprzednia	<b>519,99 zł</b>
-----------------	------------------

Dostępność	<b>Dostępny</b>
------------	-----------------

Czas wysyłki	<b>1 - 3 dni</b>
--------------	------------------


Kod producenta	<b>WN04-1004S</b>
----------------	-------------------

Producent	<b>Walksnail</b>
-----------	------------------

### Opis produktu

#### Walksnail AVATAR HD Mini 1S Kit

## AVATAR MINI 1S KIT

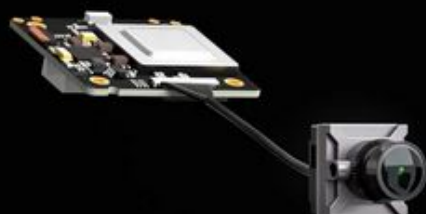

1080P/60fps



22ms low latency



3.1V-5V



Power 350mW



Built-in 8G storage



6.8g light weight

## 1080P/60FPS, 720P/120FPS

The Avatar HD system uses H.265 code, an industry-leading technology, to provide 1080p FPV image quality with ultra-low latency.



## 6.8g light weight board

The Avatar mini 1S VTX weights only 6.8g and fits perfectly with the 75X quad.

**75mm**




## 22ms Low Latency

Supports both high frame rate and standard frame rate, in high frame rate, it has an average latency of 22ms.



## 8G Built-in Storage

The Avatar mini 1s vtx comes with 8g built-in storage, it can record 1080p with 60fps or 720p with 100fps/60fps HD flight videos without interference.

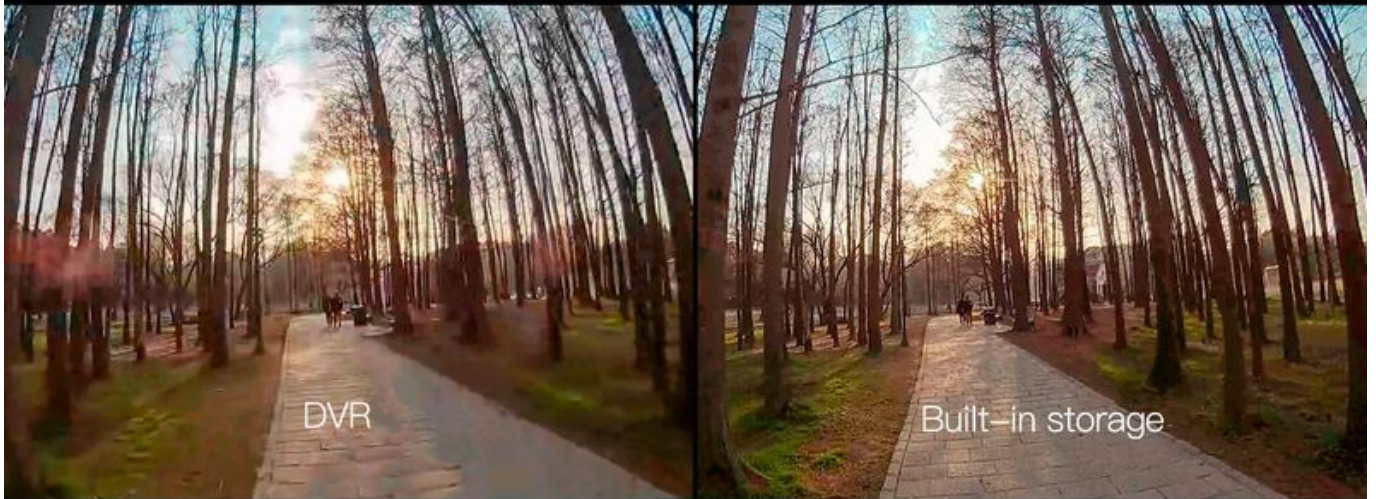

## Camera

Model	Avatar nano
Image Sensor	1/2.7" Inch
Resolution	1080P/60fps, 720P/120fps, 720P/60fps
Ratio	16/9 4/3
Lens	2.1mm
FOV	170°
Aperture	F2.0
Shutter	Rolling shutter
Min.Illumination	0.001Lux
Weight	3.5g
Dimensions	14*14*17mm
Coaxial Cable	45mm / 90mm

## VTX

Model	Avatar mini 1s module
Communication Frequency	5.725–5.850 GHz
Transmitter Power (EIRP)	FCC: <25.5dBm; CE: <14dBm; SRRC: <20dBm; MIC: <25dBm
I/O Interface	JST1.0*6(Power in) JST1.0*4(USB)
Mounting Holes	25.5*25.5 mm
Dimensions	33*33*6.5 mm
Storage	8 G
Recording	1080p/720p
Weight	6.8 g
Operating Temperature	-20–40°C
Channels	8
Wide Power Input	3.1V–5V
Supported FC System	Betaflight
OSD	Canvas mode
Bitrate	25mbps / 50mbps
Latency	Average delay 22ms
Antenna	IPEX