

Dane aktualne na dzień: 13-04-2026 02:32

Link do produktu: <https://www.nobshop.pl/silnik-t-motor-velox-v3-2306-1950kv-green-p-4788.html>



Silnik T-Motor VELOX V3 2306 1950KV Green

Cena brutto	69,00 zł
Cena netto	56,10 zł
Dostępność	Aktualnie niedostępny
Czas wysyłki	1 - 3 dni
Kod EAN	6971360356721
Producent	T-Motor

Opis produktu

Silnik T-Motor VELOX V3 2306 1950KV Green

V2306 V3.0

Designed for pilots to challenge themselves constantly, so they can be free while flying.
Feel the wind, free yourself and challenge your limits.



ENHANCED LOW TORQUE

precise control, suitable for flow and bando flight

KV1750



STRONG POWER

Acro tricks

KV1950




4S VOLTAGE FLIGHT

KV2550



V2306 V3 Product Drawing






V2306 V3 Specifications

KV	Configuration	Shaft Diameter	Lead	Weight (incl. Cable)	Rated Voltage (V)	Rated Current (A)	Life (10V)	Max. Power (00%)	Peak Current(00%)
1750KV	12N14P	Rx 4mm OUT:5mm	20# 150mm	33.8	65	0.85A	800.7	34.9	
1950KV	12N14P	Rx 4mm OUT:5mm	20# 150mm	33.7	65	1.3A	976	41.7	
2550KV	12N14P	Rx 4mm OUT:5mm	20# 150mm	32.6	45	1.95A	533.7	34.5	

V2306 V3 Test Report

Propeller	Type	Throttle	Voltage (V)	Current (A)	RPM	Thrust (g)	Power (W)	Efficiency (g/W)
T-MOTOR P48436-3	1750KV	20%	24.0	1.9	11818.1	176.6	45.1	3.92
		40%	24.0	6.0	10038.0	439.4	142.9	3.07
		60%	23.9	10.7	22021.2	664.2	255.2	2.60
		80%	23.8	17.8	26999.3	953.8	423.3	2.26
	1950KV	20%	23.6	10.8	11468.2	135.1	256.6	1.95
		40%	24.0	2.3	12593.7	194.3	55.6	3.49
		40%	23.9	7.1	10012.8	483.5	175.5	2.76
		60%	23.8	13.3	23336	740.1	316.1	2.34
	2550KV	80%	23.7	22.0	27888.2	1014.2	528.8	2.06
		100%	23.5	36.8	32463.3	1468.6	603.9	1.78
		20%	16.0	2.3	10520.9	121.4	36.2	3.35
		40%	15.9	6.8	16221.2	332.5	108.3	3.07
T-MOTOR TS1438-3	1750KV	20%	24.0	1.9	11568.8	167.1	45.3	3.69
		40%	24.0	6.0	17835.1	426.8	143.1	2.98
		60%	23.9	10.8	21878.9	659.1	258.2	2.55
		80%	23.8	17.9	26366.5	961.5	425.3	2.26
	1950KV	100%	23.6	30.3	31822.7	1356.8	714.2	1.90
		20%	24.0	2.3	12346.3	191.9	56.3	3.41
		40%	23.9	7.4	18868.8	477.6	176.2	2.71
		60%	23.8	13.4	23124.7	743.7	320.4	2.32
	2550KV	80%	23.7	23.2	27814.2	1020.7	526.5	2.06
		100%	23.5	37.1	32762.3	1481.8	871.8	1.70
		20%	16.0	2.3	10367.9	126.7	36.1	3.51
		40%	15.9	6.8	16014.8	330.3	108.8	3.04
T-MOTOR TS147-3	1750KV	60%	15.8	12.5	19778.6	521.8	197.4	2.64
		80%	15.7	19.8	24615.5	762.9	316.8	2.40
		100%	15.5	32.8	27994	1091.2	508.6	2.15
		20%	24.0	1.9	10732.8	186.2	46.6	4.00
	1950KV	40%	24.0	6.2	16597	471.7	147.6	3.20
		60%	23.9	11.9	20937.6	746.5	284.5	2.62
		80%	23.7	20.9	25207.7	1145.2	461.8	2.49
		100%	23.5	34.9	29115.1	1577.9	820.7	1.92
	2550KV	20%	24.0	2.4	11491.1	208.8	57.0	3.66
		40%	23.9	7.8	17710.9	542.1	186.5	2.91
		60%	23.8	14.8	21718.8	845.7	294.2	2.89
		80%	23.6	25.6	26258.4	1268.2	601.3	2.01
2550KV	100%	23.4	41.7	30816.2	1688.7	976.0	1.73	
	20%	16.0	2.3	10315.5	137.8	36.2	3.81	
	40%	15.9	6.9	15886	367.3	109.9	3.34	
	60%	15.8	12.8	19559.9	576.7	202.1	2.85	
2550KV	80%	15.7	20.6	23393.5	849.4	324.3	2.62	
	100%	15.5	34.5	27522.1	1221.6	533.7	2.29	

V2306 V3 Testing graph

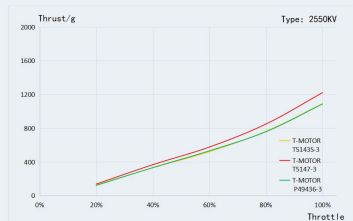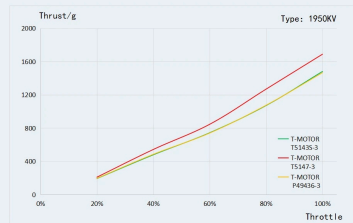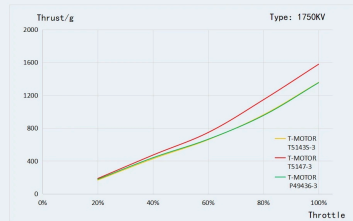

V2306 V3 Contents



Please check that your package contains all the above items before use, if something is missing. Please contact online customer service or leave message to q@tencelife.com

