Dane aktualne na dzień: 30-10-2026 10:51

Link do produktu: https://www.nobshop.pl/silnik-t-motor-velox-v3-2306-1950kv-green-p-4788.html




Silnik T-Motor VELOX V3 2306 1950KV Green


Cena brutto	**69,00 zł**
Cena netto	**56,10 zł**
Dostępność	**Aktualnie niedostępny**
Czas wysyłki	**1 - 3 dni**
Kod EAN	**6971360356721**
Producent	**T-Motor**

Opis produktu

Silnik T-Motor VELOX V3 2306 1950KV Green

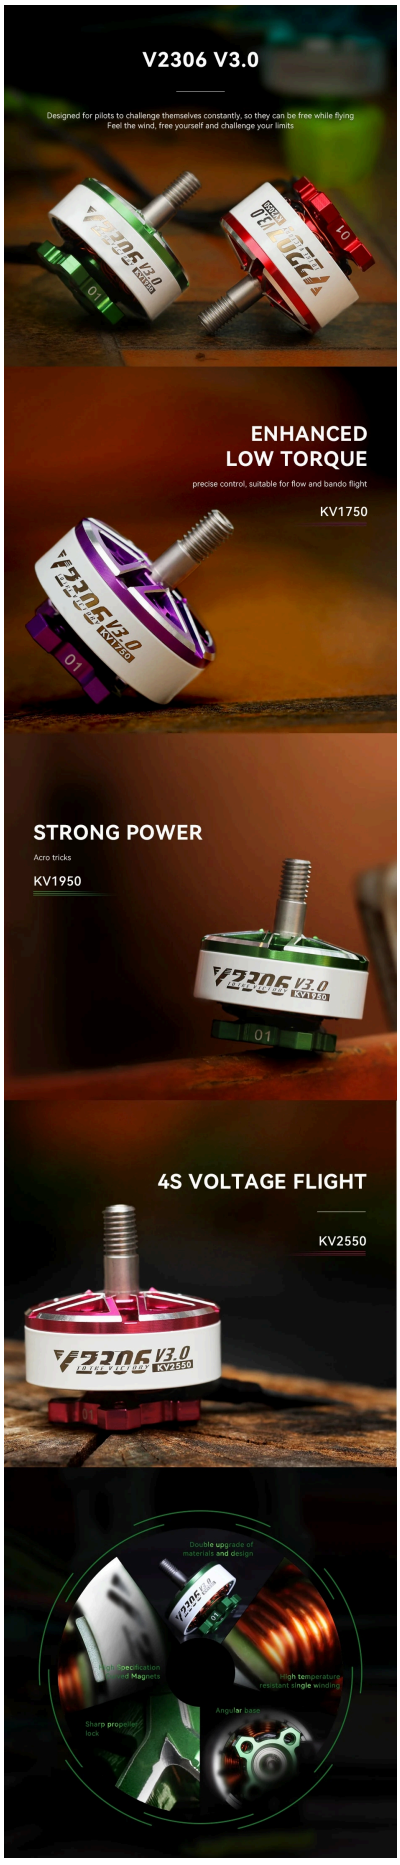
V2306 V3.0
Designed for pilots to challenge themselves constantly, so they can be free while flying
Feel the wind, free yourself and challenge your limits
ENHANCED
LOW TORQUE
precise control, suitable for flow and bando flight
KV1750
STRONG POWER
Acro tricks
KV1950
4S VOLTAGE FLIGHT
KV2550
Double upgrade of
materials and design
Angular base
Sharp propeller
lock

V2306 V3 Product Drawing




V2306 V3 Specifications


KV	Configuration	Shaft Diameter	Lead	Weight (Incl. Cable)	Rated Voltage (Lipo)	Idle Current (10V)	Max. Power (60s)	Peak Current(60s)
1750KV	12N14P	IN: 4mm OUT:5mm	20# 150mm	33.8	6S	0.85A	820.7	34.9
1950KV	12N14P	IN: 4mm OUT:5mm	20# 150mm	33.7	6S	1.3A	976	41.7
2550KV	12N14P	IN: 4mm OUT:5mm	20# 150mm	32.6	4S	1.95A	533.7	34.5


V2306 V3 Test Report

Propeller	Type	Throttle	Voltage (V)	Current (A)	RPM	Thrust (g)	Power (W)	Efficiency (g/W)
T-MOTOR P49436-3	1750KV	20%	24.0	1.9	11818.1	176.6	45.1	3.92
		40%	24.0	6.0	18030.9	439.4	142.9	3.07
		60%	23.9	10.7	22021.2	664.2	255.2	2.60
		80%	23.8	17.8	26399.3	953.8	422.3	2.26
		100%	23.6	30.0	31486.2	1353.1	706.6	1.91
	1950KV	20%	24.0	2.3	12593.7	194.3	55.6	3.49
		40%	23.9	7.3	19012.8	483.5	175.5	2.76
		60%	23.8	13.3	23336	740.1	316.1	2.34
		80%	23.7	22.0	27880.2	1074.2	520.8	2.06
		100%	23.5	36.8	32945.3	1466.9	861.9	1.70
	2550KV	20%	16.0	2.3	10520.9	121.4	36.2	3.35
		40%	15.9	6.8	16221.2	332.5	108.3	3.07
		60%	15.9	12.3	19987	531.8	195.3	2.72
		80%	15.7	19.4	23741	758.5	305.6	2.48
		100%	15.5	32.3	28139.9	1087.0	502.2	2.16
T-MOTOR T5143S-3	1750KV	20%	24.0	1.9	11566.8	167.1	45.3	3.69
		40%	24.0	6.0	17835.1	426.8	143.1	2.98
		60%	23.9	10.8	21876.9	659.1	258.2	2.55
		80%	23.8	17.9	26306.5	961.5	425.3	2.26
		100%	23.6	30.3	31362.7	1356.8	714.2	1.90
	1950KV	20%	24.0	2.3	12356.3	191.9	56.3	3.41
		40%	23.9	7.4	18868.8	477.6	176.2	2.71
		60%	23.8	13.4	23124.7	743.7	320.4	2.32
		80%	23.7	22.2	27814.2	1070.7	526.5	2.03
		100%	23.5	37.1	32702.3	1481.3	871.8	1.70
	2550KV	20%	16.0	2.3	10367.9	126.7	36.1	3.51
		40%	15.9	6.8	16014.8	330.3	108.8	3.04
		60%	15.8	12.5	19778.6	521.8	197.4	2.64
		80%	15.7	19.8	23611.5	762.9	310.8	2.45
		100%	15.5	32.8	27994	1091.2	508.6	2.15
T-MOTOR T5147-3	1750KV	20%	24.0	1.9	10732.8	186.2	46.6	4.00
		40%	24.0	6.2	16597	471.7	147.6	3.20
		60%	23.9	11.9	20537.6	746.5	284.5	2.62
		80%	23.7	20.9	25207.7	1145.2	495.8	2.31
		100%	23.5	34.9	29715.1	1577.9	820.7	1.92
	1950KV	20%	24.0	2.4	11491.3	208.8	57.0	3.66
		40%	23.9	7.8	17710.9	542.1	186.5	2.91
		60%	23.8	14.9	21783.8	845.3	354.2	2.39
		80%	23.6	25.6	26358.4	1268.2	605.3	2.10
		100%	23.4	41.7	30816.2	1688.7	976.0	1.73
	2550KV	20%	16.0	2.3	10315.5	137.8	36.2	3.81
		40%	15.9	6.9	15688	367.3	109.9	3.34
		60%	15.8	12.8	19505.9	576.7	202.1	2.85
		80%	15.7	20.6	23309.5	849.4	324.3	2.62
		100%	15.5	34.5	27522.3	1221.6	533.7	2.29

V2306 V3 Testing graph

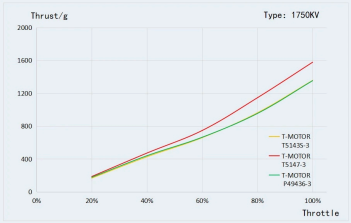

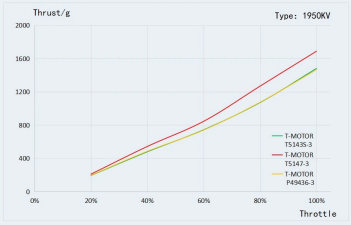

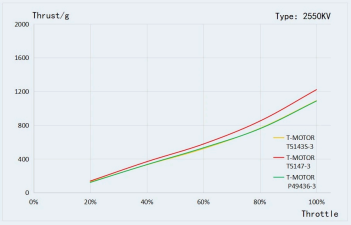

V2306 V3 Contents



Motor×1



Parts Bag×1

Please check that your package contains all the above items before use, if something is missing, Please contact online customer service or leave message to onlinesales@tmotor.com